



G.P.T CO

Gol Pump Technology Company

Designed for light weight, excellent performance, low energy consumption, and easy maintenance, PRORIL submersible handy pumps serve a wide range of pumping applications on utility, construction, industrial, and municipal job sites.

60Hz


Handy and Residue Pump

SMART 400

Handy Pump



OPENED






G.P.T CO

www.golpumps.com
www.golpumps.us

Hz 60

SMART 400
Handy Pump


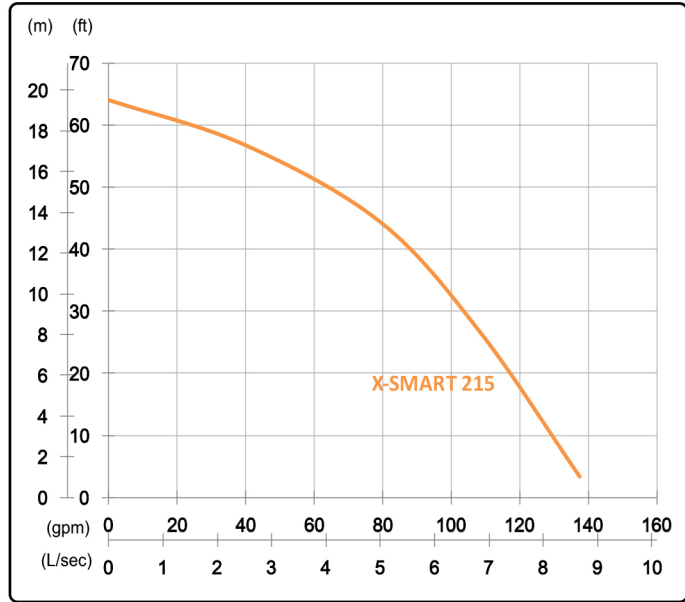


Shaft Speed : 3450 rpm

Outlet : 50mm, 2in

| OUTPUT | HEAD | FLOW |
|--------|-------------------|-------------------------|
| 1.5 kW | Rated : 14m, 46ft | Rated : 3.3 L/s, 53 gpm |
| 2 HP | Max : 18m, 59ft | Max : 7.7 L/s, 122 gpm |

Solid Passage : 37mm, 1.5in

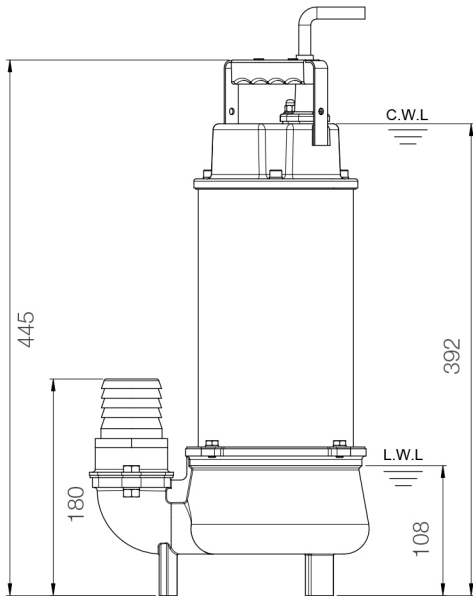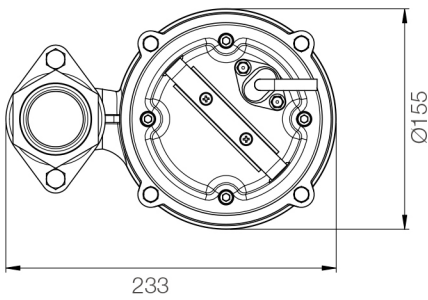

unit : mm

Weight : 15kg / 33 lbs

| | | |
|-------------------------|-------------|---|
| Pump Type | | Electric Submersible Pumps |
| | | 1-Phase, 3-Phase |
| Motor | Type | Induction Motor |
| | Poles | 2 Pole |
| | Insulation | Class F |
| | Protector | Circle Thermal Protector |
| | Starter | 1-Phase · Capacitor-Run, 3-Phase · D.O.L. |
| Lubricant | | Food Grade (ISO VG32) |
| Impeller Type | | Vortex |
| Shaft Seal | | Double Mechanical Seal |
| | | Silicon Carbide VS Ceramic / Carbon |
| Bearings | | C3 Shielded ball bearings |
| Cable | | PVC (CSA Certified) / H07RN-F |
| | | 6m (20ft) or longer upon request. |
| Materials | Pump Casing | Stainless Steel |
| | Impeller | Stainless Steel |
| | Motor Frame | Stainless Steel |
| | Motor Shaft | Stainless Steel |
| Max. Liquid Temperature | | 40°C (104°F) |
| Max. Submersion Depth | | 20m (66ft) |
| pH Range | | pH 5 - pH 8 |