


Pump Data

Brand :	Gol Pump		
Model :	GHM - 05 T 50		
Head Rate: 23 FEET	Flow Rate:	33 GPM	
Head Max: 39 FEET	Flow Max:	62 GPM	
Head Min: 6 FEET	Flow Min :	5 GPM	
RPM :	3450 rpm		
Normal Power P1 :	0.5 HP		
Fluid:	Water		
Fluid Temperature:	at about 25 °C		
Density:	water 997 kg/m ³		
Fluid Viscosity:	8.90 × 10 ⁻⁴ Pa·s		
With Float switch	NONE		
Self Priming	Submersible		
Delivery size	2" NPT		
Suction size	With Strainer		
Made in :	TAIWAN		

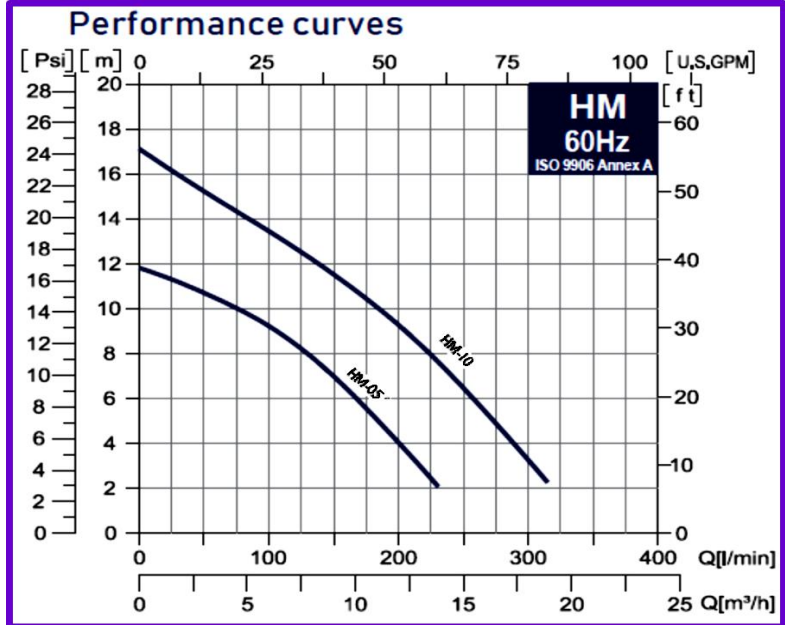

Motor Data

Power P2:	*	
Power P1:	0.37 KW	
Phase (PH):	3	
Rate Voltage :	380 V	
Capacitor Need :	*	µF
Ferequency :	60 Hz	
Rated Speed (rpm):	3450 rpm	
Current (A):	1.2 A	
Cos φ :	0.85	
Degree of Protection (IP):	IP 68	
Safety Protection Included :	F	
length of Cable :	10 M	
Kind of Plug :	NONE	
Ambient Temp :	40°C = 104°F	

Other Pump Data


Impeller Size (mm) :	*
Pressuer Rating :	PN 16
Min. Fluid Temp :	0°C = 0°F
Max. Fluid Temp :	40°C = 104°F
Ambient Temp :	40°C = 104°F
Humidity % :	100%

Special Specification

Installation status :	Ver
Variable frequency :	NONE
Solid Passage	10 mm

Materials

Pump Body :	ADC 12
Support:	FC 200
Impeller	FC 25
Mechanical Seal:	CA/CE * Sic/Sic
Rubber	NBR 70
Pump Shaft:	AISI 410
Strainer	PVC
outer cover:	Plastic
Motor:	Stainless steel

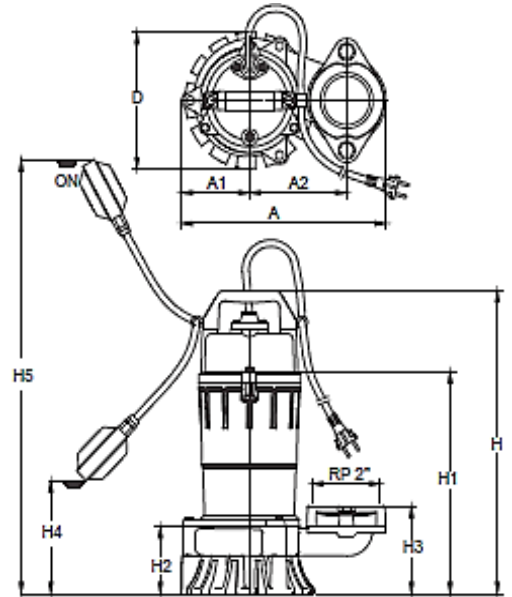

Shaft Seal

Type:	*
Stationary Part	AISI 410
Rotating Part	AISI 410
Elastomer	NBR

Pump and Motor specification optional

With Booster System	None
With Complack	None
Special Material	None
Specail Voltage	None

Protection system required

External Flout switch	None
Minimum Starter	Starter SWT

Weight : 11.9 Kg

Standard Approve

CSA



UL



CE



Applicant:

Basement Water Removal , Waste Water

Drainage , Water Transfer Sump / Effluent

Handling , Dewatering , Fish Pond Fountain

Circulation , Sewage Handling Factory

Waste Water Handling

Dimention in

mm

A	254
A1	95
A2	120
D	180
H	365
H1	264
H2	90
H3	110
H4	115
H5	535