


Pump Data

Brand :	Gol Pump		
Model :	GHM - 10 M 50		
Head Rate: 33 FEET	Flow Rate:	48 GPM	
Head Max: 57 FEET	Flow Max:	84 GPM	
Head Min: 6 FEET	Flow Min :	5 GPM	
RPM :	3450		
Normal Power P1 :	1 HP		
Fluid:	Water		
Fluid Temperature:	at about 25 °C.		
Density:	water 997 kg/m ³		
Fluid Viscosity:	8.90 × 10 ⁻⁴ Pa·s		
With Float switch	NONE		
Self Priming	Submersible		
Delivery size	2" NPT		
Suction size	With Strainer		
Made in :	TAIWAN		

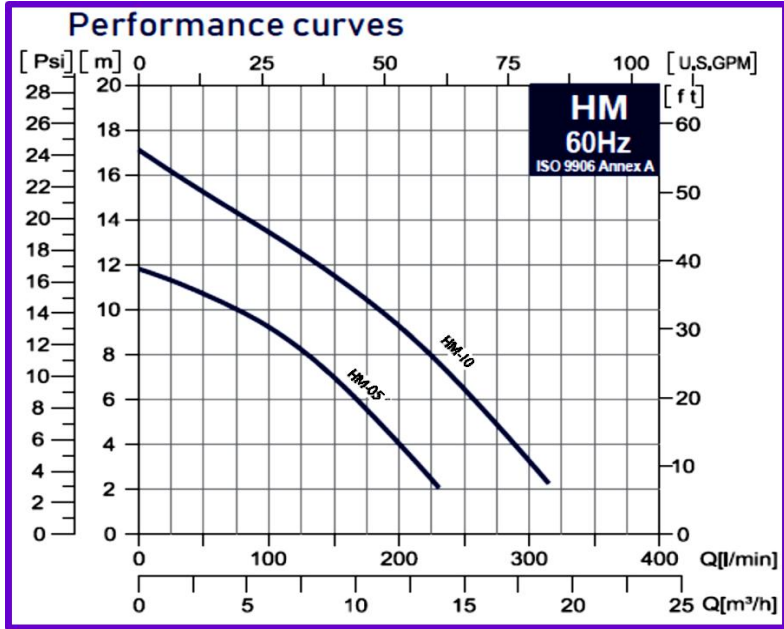

Motor Data

Power P2:			
Power P1:	0.75 KW		
Phase (PH):	1		
Rate Voltage :	220 V		
Capacitor Need :	20	µF	
Ferequency :	60 Hz		
Rated Speed (rpm):	3450 rpm		
Current (A):	5.4 A		
Cos φ :	0.95		
Degree of Protection (IP):	IP 68		
Safety Protection Included:	F		
length of Cable :	10 M		
Kind of Plug :	*		
Ambient Temp :	40°C = 104°F		

Other Pump Data


Impeller Size (mm) :	*		
Pressuer Rating :	PN 16		
Min. Fluid Temp :	0°C = 0°F		
Max. Fluid Temp :	40°C = 104°F		
Ambient Temp :	40°C = 104°F		
Humidity % :	100%		

Special Specification

Installation status :	Ver		
Variable frequency :	NONE		
Solid Passage	10 mm		

Materials

Pump Body :	ADC 12		
Support:	FC 200		
Impeller	FC 25		
Mechanical Seal:	CA/CE * Sic/Sic		
Rubber	NBR 70		
Pump Shaft:	AISI 410		
Strainer	PVC		
outer cover:	Plastic		
Motor:	Stainless steel		

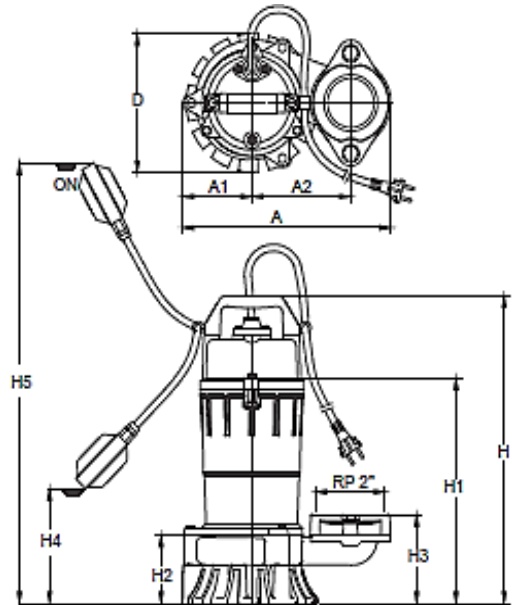

Shaft Seal

Type:	*		
Stationary Part	AISI 410		
Rotating Part	AISI 410		
Elastomer	NBR 70		

Pump and Motor specification optional

With Booster System	None		
With Complack	None		
Special Material	None		
Specail Voltage	None		

Protection system required

External Flout switch	NONE		
Minimum Starter	Starter SWT		

Weight : 15.1 Kg

Standard Approve



Applicant:

- Basement Water Removal , Waste Water
- Drainage , Water Transfer Sump / Effluent
- Handling , Dewatering , Fish Pond Fountain
- Circulation , Sewage Handling Factory
- Waste Water Handling

Dimention in
mm

A	285
A1	95
A2	135
D	180
H	380
H1	279
H2	90
H3	116
H4	130
H5	550