


Pump Data

Brand : Gol Pump
 Model : GHM - 10 T 80

Head Rate: 33 FEET Flow Rate: 48 GPM
 Head Max: 57 FEET Flow Max: 84 GPM
 Head Min: 6 FEET Flow Min : 5 GPM

RPM : 3450
 Normal Power P1 : 1 HP
 Fluid: Water
 Fluid Temperature: at about 25 °C
 Density: water 997 kg/m³
 Fluid Viscosity: 8.90 × 10⁻⁴ Pa·s
 With Float switch: NONE
 Self Priming: Submersible
 Delivery size: 3" NPT
 Suction size: With Strainer
 Made in : TAIWAN

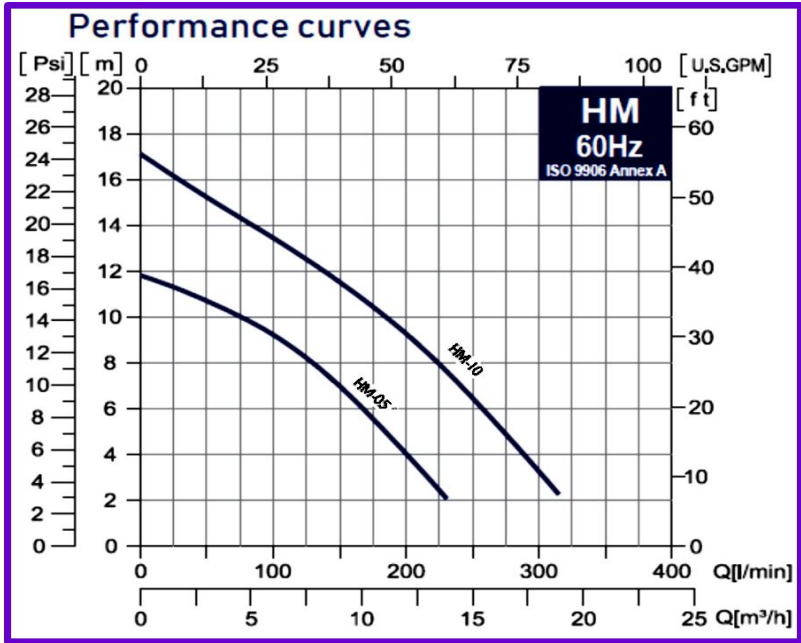

Motor Data

Power P2:
 Power P1: 0.75 KW
 Phase (PH): 3
 Rate Voltage : 380 V
 Capacitor Need : * μF
 Ferequency : 60 Hz
 Rated Speed (rpm): 3450 rpm
 Current (A): 1.9 A
 Cos φ : 0.85
 Degree of Protection (IP): IP 68
 Safety Protection Included: F
 length of Cable : 10 M
 Kind of Plug : *
 Ambient Temp : 40°C = 104°F

Other Pump Data


Impeller Size (mm) : *
 Pressuer Rating : PN 16
 Min. Fluid Temp : 0°C = 0°F
 Max. Fluid Temp : 40°C = 104°F
 Ambient Temp : 40°C = 104°F
 Humidity % : 100%

Special Specification

Installation status : Ver
 Variable frequency : NONE
 Solid Passage 10 mm

Materials

Pump Body : ADC 12
 Support: FC 200
 Impeller: FC 25
 Mechanical Seal: CA/CE * Sic/Sic
 Rubber: NBR 70
 Pump Shaft: AISI 410
 Strainer: PVC
 outer cover: Plastic
 Motor: Stainless steel

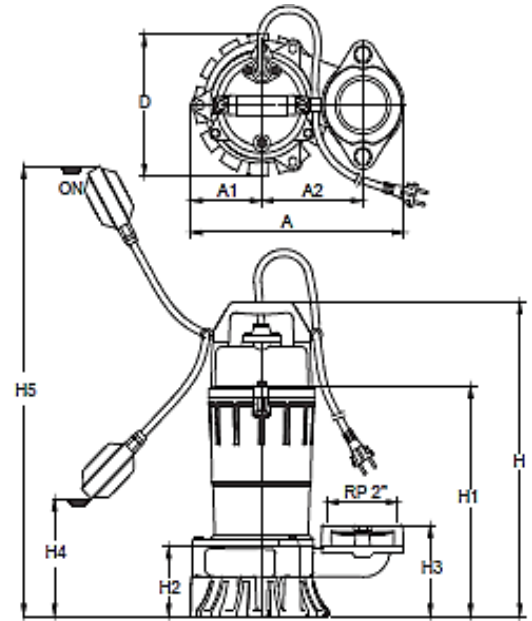

Shaft Seal

Type: *
 Stationary Part: AISI 410
 Rotating Part: AISI 410
 Elastomer: NBR 70

Weight : 14.1 Kg

Standard Approve



Applicant:

Basement Water Removal , Waste Water
 Drainage , Water Transfer Sump / Effluent
 Handling , Dewatering , Fish Pond Fountain
 Circulation , Sewage Handling Factory
 Waste Water Handling

Dimention in mm

Dimention	mm
A	285
A1	95
A2	135
D	180
H	380
H1	279
H2	90
H3	116
H4	130
H5	550

Pump and Motor specification optional

With Booster System: None
 With Complack: None
 Special Material: None
 Specail Voltage: None

Protection system required

External Flout switch: NONE
 Minimum Starter: Starter SWT