

Pump Data	
Brand :	GOL PUMPS
Model :	G2SDM-0.7 / 19
Flow Rate :	1.5 GPM
Head Rate: 99 FEET	
Head Max: 120 FEET	Flow Min: 5 GPM
Flow Max: 4.4 GPM	Head Min: 30 FEET
RPM :	3450 rpm
Normal Power P2 :	0.25 HP
Fluid:	Water
Fluid Temperature:	at about 25 °C.
Density:	water 1.0 kg/Dm ³
Fluid Viscosity:	8.90 × 10 ⁻⁴ Pa·s
With Float switch	NONE
Kind of Workiny:	Submersible
Delivery size	3/4" NPT
Suction size	With Strainer
Made in :	CHINA

Motor Data	
Power P2:	0.18 KW
Power P1:	*
Phase (PH):	1
Rate Voltage :	220 V
Capacitor Need :	12/450 μF/V
Ferequency :	60 Hz
Rated Speed (rpm):	3450 rpm
Current (A):	2.2 A
Cos φ :	0.95
Degree of Protection (IP):	IP 68
Safety Protection Included:	F
length of Cable :	2 M
Kind of Plug :	NONE
Ambient Temp :	40°C = 104°F

Other Pump Data	
Impeller Size (mm) :	*
Pressuer Rating :	PN 16
Min. Fluid Temp :	10°C = 50°F
Max. Fluid Temp :	35°C = 95°F
Ambient Temp :	40°C = 104°F
Humidity % :	100%


Special Specification	
Installation status :	Vertical
Variable frequency :	NONE
Solid Passage	0.25%

Materials	
Pump Body :	AISI 304 SS
Support:	AISI 304 SS
Impeller	Plastic . POM
Mechanical Seal:	Graphite/Ceramic
Rubber	NBR
Pump Shaft:	AISI 304 SS
Strainer	AISI 304 SS
outer cover:	Cast Iron
Motor Case:	AISI 304 SS

Shaft Seal	
Type:	*
Stationary Part	Ceramic
Rotating Part	Graphite
Elastomer	NBR

Pump and Motor specification optional	
With Booster System	None
With Complack	None
Special Material	None
Specail Voltage	None

Protection system required	
External Flout switch	NONE
Minimum Starter	Over Load and Capacitor Box Include

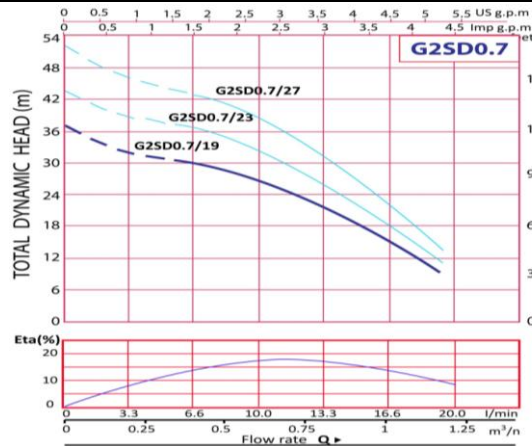

Weight : 5.95 Kg		Applicant:		Dimention in	
Standard Approve				mm	
CE	CE	For Water Supply from		P	621
		Wells or Reservoirs for		M	499
		Domestic Use for Civil and		T	1120
		Industrial Applications for		D1	51
		Garden Use and Irrigation		D2	50
				DN	3/4"