

Thin Submersible Pump GOL PUMPS

3.5" Inch Pump for 4" inch well

Pump Data

Brand :	GOL PUMPS	
Model :	G3.5 SD - M 2/25	
Flow Rate:	10 GPM	
Head Rate: 570 FEET	Flow Min:	2.5 GPM
Head Max: 706 FEET	Head Min:	296 FEET
Flow Max: 16 GPM	RPM :	3450 rpm
Normal Power P2 :	2 HP	
Fluid:	Water	
Fluid Temperature:	at about 25 °C.	
Density:	water 1.0 kg/Dm ³	
Fluid Viscosity:	8.90 × 10 ⁻⁴ Pa·s	
With Float switch	NONE	
Kind of Workiny:	Submersible	
Delivery size:	1 1/2" NPT	
Suction size:	With Strainer	
Made in :	CHINA	

Motor Data

Power P2:	1.5 KW	
Power P1:	*	
Phase (PH):	1	
Rate Voltage :	220 V	μF/V
Capacitor Need :	50/450	
Ferequency :	60 Hz	
Rated Speed (rpm):	3450 rpm	
Current (A):	9.7 A	
Cos φ :	0.93	
Degree of Protection (IP):	IP 68	
Safety Protection Included:	F	
length of Cable :	2 M	
Kind of Plug :	NONE	
Ambient Temp :	40°C = 104°F	

Other Pump Data

Impeller Size (mm) :	*
Pressuer Rating :	PN 16
Min. Fluid Temp :	10°C = 50°F
Max. Fluid Temp :	35°C = 95°F
Ambient Temp :	40°C = 104°F
Humidity % :	100%

Special Specification

Installation status :	Vertical
Variable frequency :	NONE
Solid Passage	0.25%

Materials

Pump Body :	AISI 304 SS
Support:	AISI 304 SS
Impeller	Plastic POM
Mechanical Seal:	Graphite\Ceramic
Rubber	NBR
Pump Shaft:	AISI 304 SS
Strainer	AISI 304 SS
outer cover:	Cast Iron
Motor Case:	AISI 304 SS

Shaft Seal



Type:	*
Stationary Part	Ceramic
Rotating Part	Graphite
Elastomer	NBR

Pump and Motor specification optional

With Booster System	None
With Complack	None
Special Material	None
Specail Voltage	None

Protection system required

External Flout switch	NONE
Minimum Starter	Over Load and Capacitor Box Include

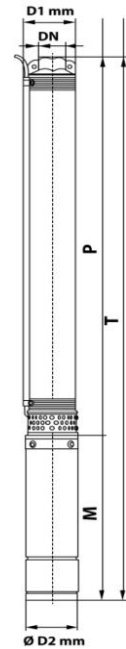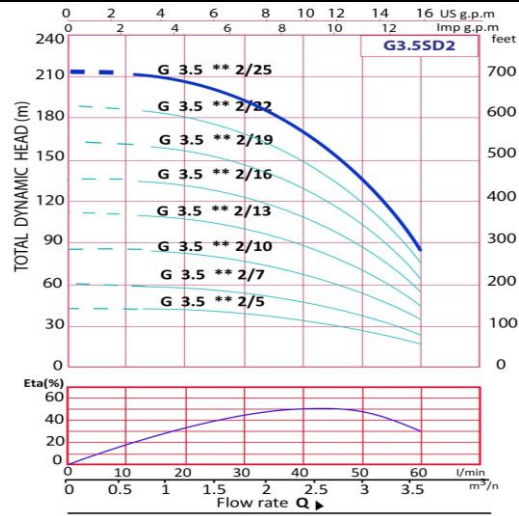

Weight : 17.2 Kg

Standard Approve



Applicant:

For Water Supply from
Wells or Reservoirs for
Domestic Use for Civil and
Industrial Applications for
Garden Use and Irrigation

Dimention in

	mm
P	865
M	463
T	1328
DN	1 1/2"
D1	85
D2	84