

Thin Submersible Pump GOL PUMPS

3.5" Inch Pump for 4" inch well

Pump Data

Brand : GOL PUMPS
 Model : G3.5 SD - M 2/5
 Flow Rate: 10 GPM
 Head Rate: 116 FEET
 Head Max: 143 FEET
 Flow Max: 16 GPM
 RPM : 3450 rpm
 Normal Power P2 : 0.33 HP
 Fluid: Water
 Fluid Temperature: at about 25 °C.
 Density: water 1.0 kg/Dm³
 Fluid Viscosity: 8.90 × 10⁻⁴ Pa·s
 With Float switch: NONE
 Kind of Working: Submersible
 Delivery size: 1 1/2" NPT
 Suction size: With Strainer
 Made in : CHINA

Motor Data

Power P2: 0.25 KW
 Power P1: *
 Phase (PH): 1
 Rate Voltage : 220 V
 Capacitor Need : 15/450 μf/V
 Ferequency : 60 Hz
 Rated Speed (rpm): 3450 rpm
 Current (A): 2.4 A
 Cos φ : 0.93
 Degree of Protection (IP): IP 68
 Safety Protection Included: F
 length of Cable : 2 M
 Kind of Plug : NONE
 Ambient Temp : 40°C = 104°F

Other Pump Data

Impeller Size (mm) : *
 Pressuer Rating : PN 16
 Min. Fluid Temp : 10°C = 50°F
 Max. Fluid Temp : 35°C = 95°F
 Ambient Temp : 40°C = 104°F
 Humidity % : 100%

Special Specification

Installation status : Vertical
 Variable frequency : NONE
 Solid Passage : 0.25%

Materials

Pump Body : AISI 304 SS
 Support: AISI 304 SS
 Impeller: Plastic POM
 Mechanical Seal: Graphite\Ceramic
 Rubber: NBR
 Pump Shaft: AISI 304 SS
 Strainer: AISI 304 SS
 outer cover: Cast Iron
 Motor Case: AISI 304 SS

Shaft Seal



Type: *
 Stationary Part: Ceramic
 Rotating Part: Graphite
 Elastomer: NBR

Pump and Motor specification optional

With Booster System: None
 With Complack: None
 Special Material: None
 Speacil Voltage: None

Protection system required

External Flout switch: NONE
 Minimum Starter: Over Load and Capacitor
 Box Include

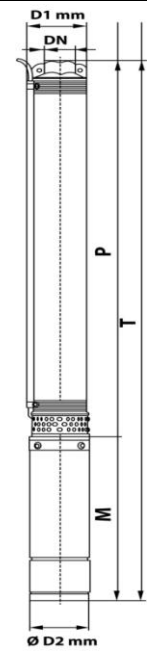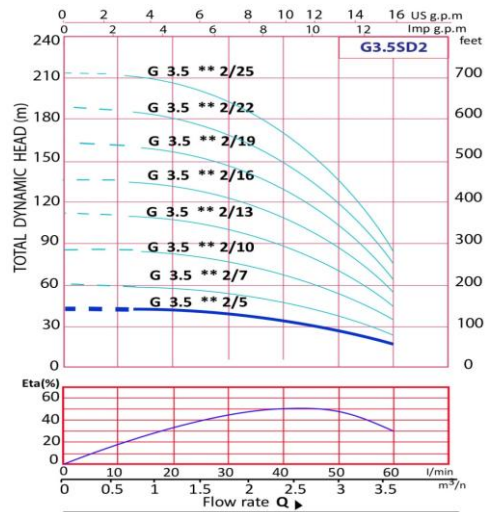

Weight : 7.4 Kg		Applicant:	Dimention in	
Standard Approve			mm	
CE	CE	For Water Supply from	P	340
		Wells or Reservoirs for	M	303
		Domestic Use for Civil and	T	643
		Industrial Applications for	DN	1 1/2"
		Garden Use and Irrigation	D1	85
			D2	84