

Thin Submersible Pump GOL PUMPS

3.5" Inch Pump for 4" inch well

Pump Data

Brand : GOL PUMPS
 Model : G3.5 SD - M 6/10
 Flow Rate: 20 GPM
 Head Rate: 206 FEET
 Head Max: 280 FEET
 Flow Max: 32 GPM
 RPM : 3450 rpm
 Normal Power P2 : 1.5 HP
 Fluid: Water
 Fluid Temperature: at about 25 °C.
 Density: water 1.0 kg/Dm³
 Fluid Viscosity: 8.90 × 10⁻⁴ Pa·s
 With Float switch: NONE
 Kind of Workiny: Submersible
 Delivery size: 1 1/2" NPT
 Suction size: With Strainer
 Made in : CHINA

8 GPM
66 FEET

Motor Data

Power P2: 1.1 KW
 Power P1: *
 Phase (PH): 1
 Rate Voltage : 220 V
 Capacitor Need : 40/450 μf/V
 Ferequency : 60 Hz
 Rated Speed (rpm): 3450 rpm
 Current (A): 7.2 A
 Cos φ : 0.93
 Degree of Protection (IP): IP 68
 Safety Protection Included: F
 length of Cable : 2 M
 Kind of Plug : NONE
 Ambient Temp : 40°C = 104°F

Other Pump Data

Impeller Size (mm) : *
 Pressuer Rating : PN 16
 Min. Fluid Temp : 10°C = 50°F
 Max. Fluid Temp : 35°C = 95°F
 Ambient Temp : 40°C = 104°F
 Humidity % : 100%

Special Specification

Installation status : Vertical
 Variable frequency : NONE
 Solid Passage : 0.25%

Materials



Pump Body : AISI 304 SS
 Support: AISI 304 SS
 Impeller: Plastic POM
 Mechanical Seal: Graphite\Ceramic
 Rubber: NBR
 Pump Shaft: AISI 304 SS
 Strainer: AISI 304 SS
 outer cover: Cast Iron
 Motor Case: AISI 304 SS

Shaft Seal

Type: *
 Stationary Part: Ceramic
 Rotating Part: Graphite
 Elastomer: NBR

Pump and Motor specification optional

With Booster System: None
 With Complack: None
 Special Material: None
 Specail Voltage: None
 Protection system required
 External Flout switch: NONE
 Minimum Starter: Over Load and Capacitor Box Include

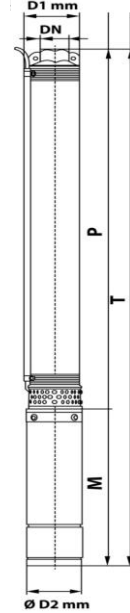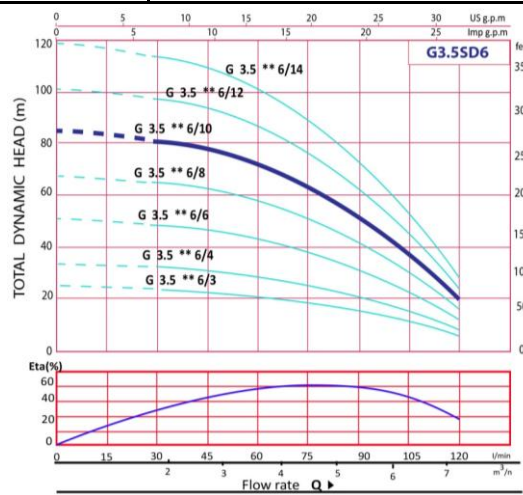

Weight : 12.6 Kg

Applicant:

Dimention in

Type: *
 Stationary Part: Ceramic
 Rotating Part: Graphite
 Elastomer: NBR



For Water Supply from
 Wells or Reservoirs for
 Domestic Use for Civil and
 Industrial Applications for
 Garden Use and Irrigation

	mm
P	500
M	413
T	913
DN	1 1/2"
D1	85
D2	84