

**Pump Data**

Brand : GOL PUMPS  
 Model : G3.5 SD - M 6/4  
 Flow Rate: 20 GPM  
 Head Rate: 76 FEET  
 Head Max: 113 FEET  
 Flow Max: 32 GPM  
 RPM : 3450 rpm  
 Normal Power P2 : 0.75 HP  
 Fluid: Water  
 Fluid Temperature: at about 25 °C.  
 Density: water 1.0 kg/Dm<sup>3</sup>  
 Fluid Viscosity: 8.90 × 10<sup>-4</sup> Pa·s  
 With Float switch: NONE  
 Kind of Working: Submersible  
 Delivery size: 1 1/2" NPT  
 Suction size: With Strainer  
 Made in : CHINA

**Motor Data**

Power P2: 0.55 KW  
 Power P1: \*  
 Phase (PH): 1  
 Rate Voltage : 220 V  
 Capacitor Need : 25/450 μF/V  
 Ferequency : 60 Hz  
 Rated Speed (rpm): 3450 rpm  
 Current (A): 4.2 A  
 Cos φ : 0.93  
 Degree of Protection (IP): IP 68  
 Safety Protection Included: F  
 length of Cable : 2 M  
 Kind of Plug : NONE  
 Ambient Temp : 40°C = 104°F

**Other Pump Data**

Impeller Size (mm) : \*  
 Pressuer Rating : PN 16  
 Min. Fluid Temp : 10°C = 50°F  
 Max. Fluid Temp : 35°C = 95°F  
 Ambient Temp : 40°C = 104°F  
 Humidity % : 100%

**Special Specification**

Installation status : Vertical  
 Variable frequency : NONE  
 Solid Passage : 0.25%

**Materials**

Pump Body : AISI 304 SS  
 Support: AISI 304 SS  
 Impeller: Plastic POM  
 Mechanical Seal: Graphite\Ceramic  
 Rubber: NBR  
 Pump Shaft: AISI 304 SS  
 Strainer: AISI 304 SS  
 outer cover: Cast Iron  
 Motor Case: AISI 304 SS

**Shaft Seal**



Type: \*  
 Stationary Part: Ceramic  
 Rotating Part: Graphite  
 Elastomer: NBR

**Pump and Motor specification optional**

With Booster System: None  
 With Complack: None  
 Special Material: None  
 Specail Voltage: None

**Protection system required**

External Flout switch: NONE  
 Minimum Starter: Over Load and Capacitor Box Include

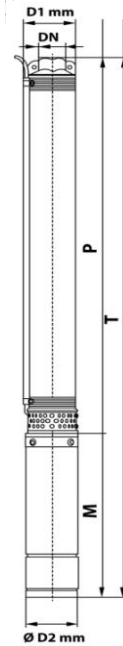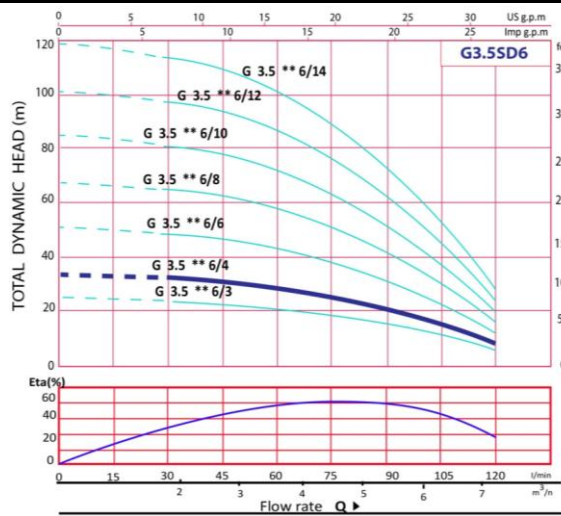

Weight : 8.6 Kg

Standard Approve



Applicant:

Dimention in

For Water Supply from Wells or Reservoirs for Domestic Use for Civil and Industrial Applications for Garden Use and Irrigation

	mm
P	325
M	338
T	663
DN	1 1/2"
D1	85
D2	84