

Pump Data		
Brand :	GOL PUMPS	
Model :	G3SD - M 2/30	
Flow Rate:	5 GPM	
Head Rate: 600 FEET	Flow Min:	5 GPM
Head Max: 620 FEET	Head Min:	200 FEET
Flow Max: 13 GPM	RPM :	3450 rpm
Normal Power P2 :	2 HP	
Fluid:	Water	
Fluid Temperature:	at about 25 °C.	
Density:	water 1.0 kg/Dm ³	
Fluid Viscosity:	8.90 × 10 ⁻⁴ Pa·s	
With Float switch	NONE	
Kind of Working:	Submersible	
Delivery size	1 1/4" NPT	
Suction size	With Strainer	
Made in :	CHINA	

Motor Data		
Power P2:	1.5 KW	
Power P1:	*	
Phase (PH):	1	
Rate Voltage :	110 V	
Capacitor Need :	100/250	µF / V
Ferequency :	60 Hz	
Rated Speed (rpm):	3450 rpm	
Current (A):	21.3 A	
Cos φ :	0.95	
Degree of Protection (IP):	IP 68	
Safety Protection Included:	F	
length of Cable :	2 M	
Kind of Plug :	NONE	
Ambient Temp :	40°C = 104°F	

Other Pump Data	
Impeller Size (mm) :	*
Pressuer Rating :	PN 16
Min. Fluid Temp :	10°C = 50°F
Max. Fluid Temp :	35°C = 95°F
Ambient Temp :	40°C = 104°F
Humidity % :	100%




Special Specification	
Installation status :	Vertical
Variable frequency :	NONE
Solid Passage	0.25%

Materials	
Pump Body :	AISI 304 SS
Support:	AISI 304 SS
Impeller	Plastic POM
Mechanical Seal:	Graphite\Ceramic
Rubber	NBR
Pump Shaft:	AISI 304 SS
Strainer	AISI 304 SS
outer cover:	Cast Iron
Motor Case:	AISI 304 SS

Shaft Seal	
Type:	*
Stationary Part	Ceramic
Rotating Part	Graphite
Elastomer	NBR

Pump and Motor specification optional	
With Booster System	None
With Complack	None
Special Material	None
Specail Voltage	None

Protection system required	
External Flout switch	NONE
Minimum Starter	Over Load and Capacitor Box Include

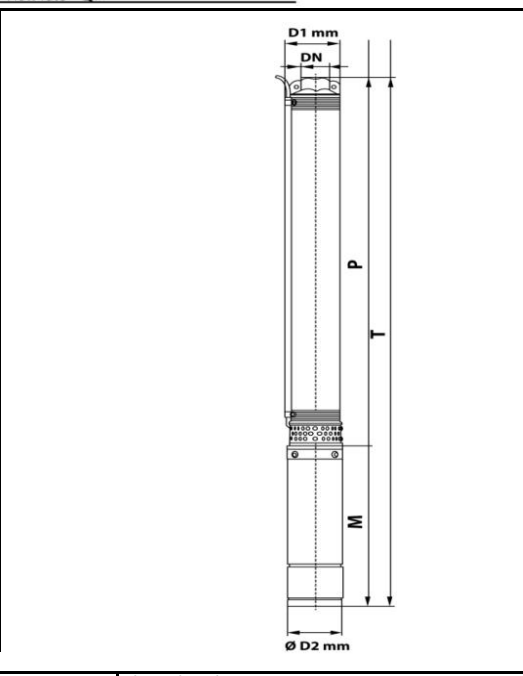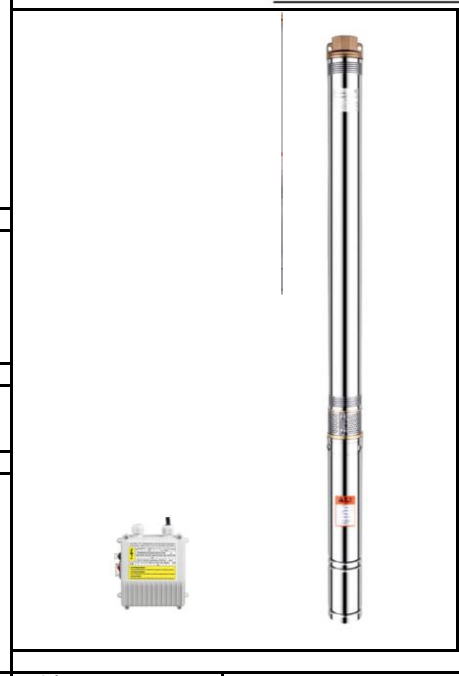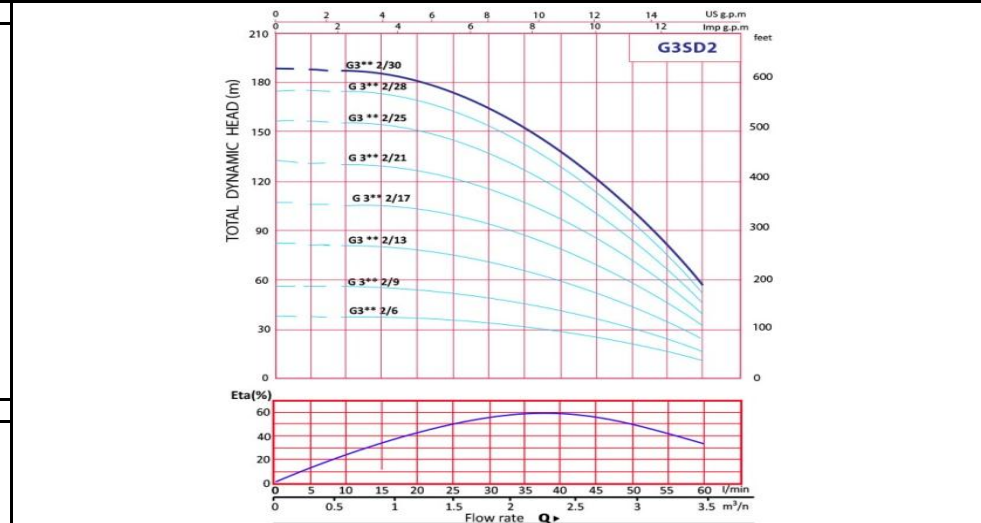

Weight : 15.2 Kg		Applicant:	Dimention in	
Standard Approve				mm
CE		For Water Supply from	P	825
		Wells or Reservoirs for	M	543
		Domestic Use for Civil and	T	1368
		Industrial Applications for	DN	1 1/4"
		Garden Use and Irrigation	D1	75
			D2	73