

Thin Submersible Pump GOL PUMPS

3" Inch Pump for 3.5" inch well

Pump Data		
Brand :	GOL PUMPS	
Model :	G3SD - M 4/15	
Flow Rate:	14 GPM	
Head Rate:	240 FEET	
Head Max:	300 FEET	
Flow Max:	22.5 GPM	2.5 GPM
RPM :	3450 rpm	100 FEET
Normal Power P2 :	1.5 HP	
Fluid:	Water	
Fluid Temperature:	at about 25 °C.	
Density:	water 1.0 kg/Dm³	
Fluid Viscosity:	8.90 × 10 ⁻⁴ Pa·s	
With Float switch	NONE	
Kind of Working:	Submersible	
Delivery size:	1 1/2" NPT	
Suction size:	With Strainer	
Made in :	CHINA	

Motor Data		
Power P2:	1.1 KW	
Power P1:	*	
Phase (PH):	1	
Rate Voltage :	220 V	
Capacitor Need :	40/450	µF/V
Ferequency :	60 Hz	
Rated Speed (rpm):	3450 rpm	
Current (A):	8 A	
Cos φ :	0.93	
Degree of Protection (IP):	IP 68	
Safety Protection Included:	F	
length of Cable :	2 M	
Kind of Plug :	NONE	
Ambient Temp :	40°C = 104°F	

Other Pump Data	
Impeller Size (mm) :	*
Pressuer Rating :	PN 16
Min. Fluid Temp :	10°C = 50°F
Max. Fluid Temp :	35°C = 95°F
Ambient Temp :	40°C = 104°F
Humidity % :	100%




Special Specification	
Installation status :	Vertical
Variable frequency :	NONE
Solid Passage	0.25%

Materials	
Pump Body :	AISI 304 SS
Support:	AISI 304 SS
Impeller	Plastic POM
Mechanical Seal:	Graphite\Ceramic
Rubber	NBR
Pump Shaft:	AISI 304 SS
Strainer	AISI 304 SS
outer cover:	Cast Iron
Motor Case:	AISI 304 SS

Shaft Seal	
Type:	*
Stationary Part	Ceramic
Rotating Part	Graphite
Elastomer	NBR

Pump and Motor specification optional	
With Booster System	None
With Complack	None
Special Material	None
Specail Voltage	None

Protection system required	
External Flout switch	NONE
Minimum Starter	Over Load and Capacitor Box Include

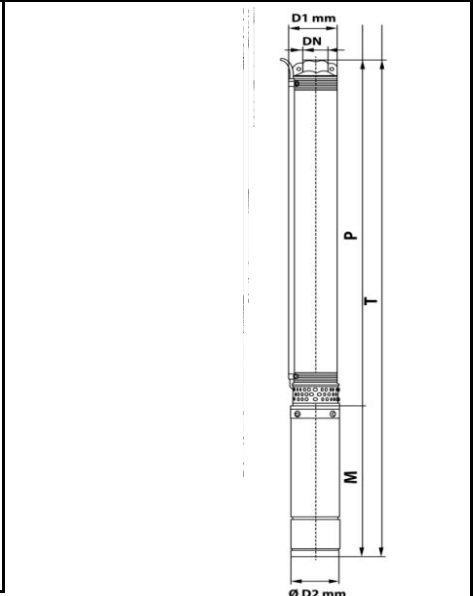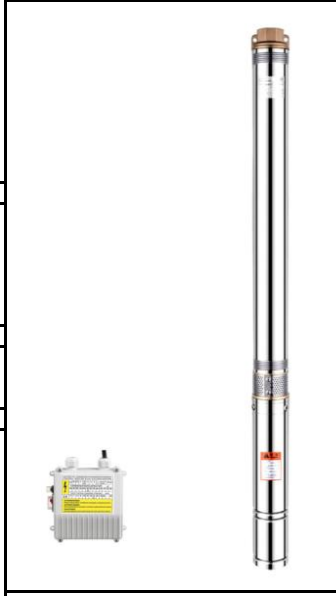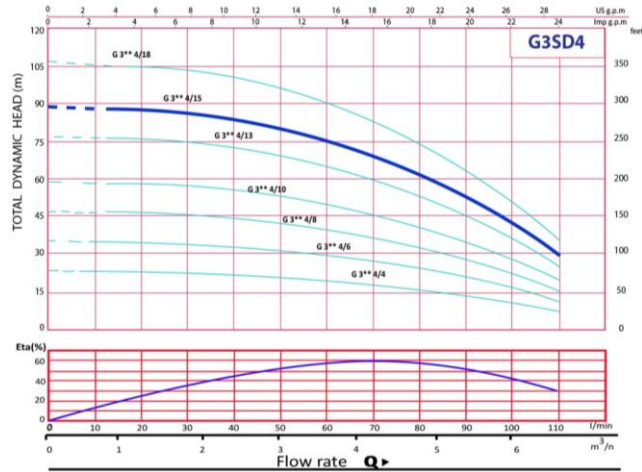

Weight : 12.5 Kg

Standard Approve



Applicant:

For Water Supply from Wells or Reservoirs for Domestic Use for Civil and Industrial Applications for Garden Use and Irrigation

Dimention in mm

P	690
M	493
T	1183
DN	1 1/2"
D1	75
D2	73