

Thin Submersible Pump GOL PUMPS

3" Inch Pump for 3.5" inch well

Pump Data

Brand : GOL PUMPS
 Model : G3SD - M 4/18
 Flow Rate : 14 GPM
 Head Rate : 276 FEET
 Head Max : 356 FEET
 Flow Max : 22.5 GPM
 RPM : 3450 rpm
 Normal Power P2 : 2 HP
 Fluid: Water
 Fluid Temperature: at about 25 °C.
 Density: water 1.0 kg/Dm³
 Fluid Viscosity: 8.90 × 10-4 Pa·s
 With Float switch : NONE
 Kind of Working: Submersible
 Delivery size: 1 1/2" NPT
 Suction size: With Strainer
 Made in : CHINA

Motor Data

Power P2: 1.5 KW
 Power P1: *
 Phase (PH): 1
 Rate Voltage : 220 V
 Capacitor Need : 50/450
 Ferequency : 60 Hz
 Rated Speed (rpm): 3450 rpm
 Current (A): 9.7 A
 Cos φ : 0.93
 Degree of Protection (IP): IP 68
 Safety Protection Included: F
 length of Cable : 2 M
 Kind of Plug : NONE
 Ambient Temp : 40°C = 104°F

Other Pump Data

Impeller Size (mm) : *
 Pressuer Rating : PN 16
 Min. Fluid Temp : 10°C = 50°F
 Max. Fluid Temp : 35°C = 95°F
 Ambient Temp : 40°C = 104°F
 Humidity % : 100%

Special Specification

Installation status : Vertical
 Variable frequency : NONE
 Solid Passage : 0.25%

Materials

Pump Body : AISI 304 SS
 Support: AISI 304 SS
 Impeller : Plastic POM
 Mechanical Seal: Graphite\Ceramic
 Rubber : NBR
 Pump Shaft: AISI 304 SS
 Strainer : AISI 304 SS
 outer cover: Cast Iron
 Motor Case: AISI 304 SS

Shaft Seal



Type: *
 Stationary Part : Ceramic
 Rotating Part : Graphite
 Elastomer : NBR

Pump and Motor specification optional

With Booster System : None
 With Complack : None
 Special Material : None
 Specail Voltage : None

Protection system required

External Flout switch : NONE
 Minimum Starter : Over Load and Capacitor Box Include

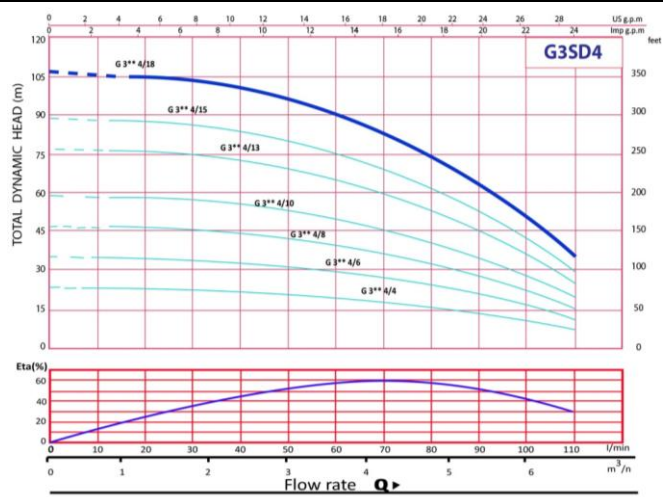

Weight : 14.1 Kg		Applicant:	Dimention in	
Standard Approve			mm	
CE	CE	For Water Supply from	P	785
		Wells or Reservoirs for	M	543
		Domestic Use for Civil and	T	1328
		Industrial Applications for	DN	1 1/2"
		Garden Use and Irrigation	D1	75
			D2	73