


Pump Data	
Brand :	JMS
Model :	JIZAR/S VOX 60 T
Flow Rate:	17.6 GPM
Head Rate: 19.5 FEET	
Head Max: 26 FEET	Flow Min : 5 GPM
Flow Max: 44 GPM	Head Min: 6 FEET
RPM :	3450 rpm
Normal Power P1 :	0.5 HP
Fluid:	Water
Fluid Temperature:	at about 25 °C.
Density:	water 1.0 kg/Dm ³
Fluid Viscosity:	8.90 × 10 ⁻⁴ Pa·s
With Float switch	NONE
kind of Workiny:	Submersible
Delivery size	1 1/4"
Suction size	With Strainer
Made in :	ITALY

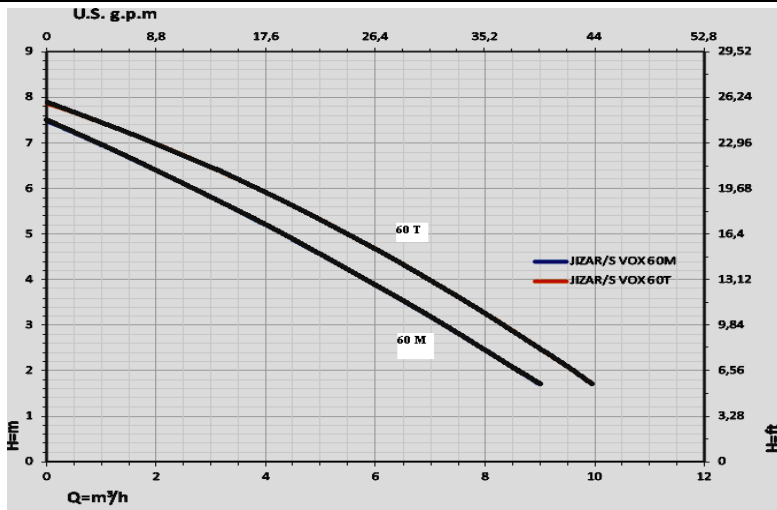


Motor Data	
Power P2:	
Power P1:	0.55 KW
Phase (PH):	3
Rate Voltage :	220 V
Capacitor Need :	* μF
Ferequency :	60 Hz
Rated Speed (rpm):	3450 rpm
Max. I (A):	1.8 A
Cos φ :	0.85
Degree of Protection (IP):	IP 68
Safety Protection Included:	F
length of Cable :	10 M
Kind of Plug :	NONE
Ambient Temp :	40°C = 104°F

Other Pump Data	
Impeller Size (mm) :	*
Pressuer Rating :	PN 16
Min. Fluid Temp :	10°C = 50°F
Max. Fluid Temp :	35°C = 95°F
Ambient Temp :	40°C = 104°F
Humidity % :	100%

Special Specification	
Installation status :	Vertical
Variable frequency :	NONE
Solid Passage	20 mm

Materials	
Pump Body :	Tecnopolymer
Support:	Stainless steel
Impeller	AISI 316
Mechanical Seal:	Silicon Carbide
Rubber	VITON
Pump Shaft:	AISI 316
Strainer	Stainless steel
outer cover:	Tecnopolymer
Motor:	Stainless steel

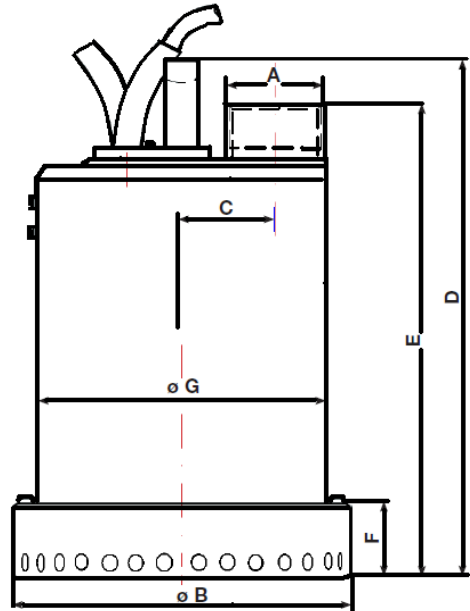

Shaft Seal	
Type:	*
Stationary Part	AISI 316
Rotating Part	AISI 316
Elastomer	VITON
Pump and Motor specification optional	
With Booster System	None
With Complack	None
Special Material	None
Specail Voltage	None
Protection system required	
External Flout switch	NONE
Minimum Starter	Starter SWT

Weight : 7.5 Kg
Standard Approve
CE

Applicant:	
Rain Seepage Sump Pit And Catch Tank Water Pump Out Garden	
And Vegetable-Garden Mini Flood Irrigation System Rainwater	
Catch Tank Pump Down White Water Pump Over From Reservoirs	
Pumping Dirty Water With Possible Floating Solid Contents	
And Vats. Pumping Aggressive Liquid	

Dimention in	
	mm
A	1 1/4"inch
B	154
C	41
D	282
E	261
F	70
G	132