

Pump Data

Brand : JMS
Model : JONTRACT 250 T
Flow Rate: 66 GPM
Head Rate: 47 FEET
Head Max: 68 FEET
Flow Max: 153 GPM
RPM : 3450 rpm
Normal Power P1 : 4 HP
Fluid: Water
Fluid Temperature: at about 25 °C.
Density: water 1.0 kg/Dm³
Fluid Viscosity: 8.90 × 10-4 Pa·s
With Float switch: NONE
kind of Workiny: Submersible
Delivery size: 2"
Suction size: With Strainer
Made in : ITALY

Motor Data

Power P1: 2.8 KW
Phase (PH): 3
Rate Voltage : 230 V
Capacitor Need : * µF
Ferequency : 60 Hz
Rated Speed (rpm): 3450 rpm
7.6 A
Cos φ : 0.85
Degree of Protection (IP): IP 68
Safety Protection Included: F
length of Cable : 10 M
Kind of Plug : NONE
Ambient Temp : 40°C = 104°F

Other Pump Data

Impeller Size (mm) : *
Pressuer Rating : PN 16
Min. Fluid Temp : 10°C = 50°F
Max. Fluid Temp : 35°C = 95°F
Ambient Temp : 40°C = 104°F
Humidity % : 100%

Special Specification

Installation status : Vertical
Variable frequency : NONE
Solid Passage 10 mm

Materials

Pump Body : Stainless steel
Support: Stainless steel
Impeller: Special Stainless steel
Mechanical Seal: Silicon Carbide
Rubber: NBR
Pump Shaft: Stainless steel
Strainer: Stainless steel
outer cover: Stainless steel
Motor Case: Stainless steel



Shaft Seal

Type: *
Stationary Part: Silicon Carbide
Rotating Part: Silicon Carbide
Elastomer: NBR

Pump and Motor specification optional

With Booster System: None
With Complack: None
Special Material: None
Specall Voltage: None
Protection system required
External Flout switch: NONE
Minimum Starter: Starter SWT

Date: Page:

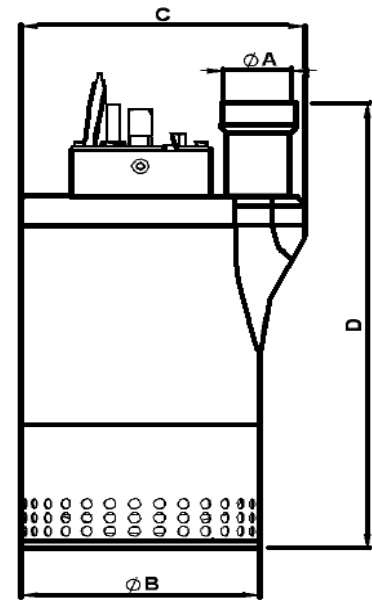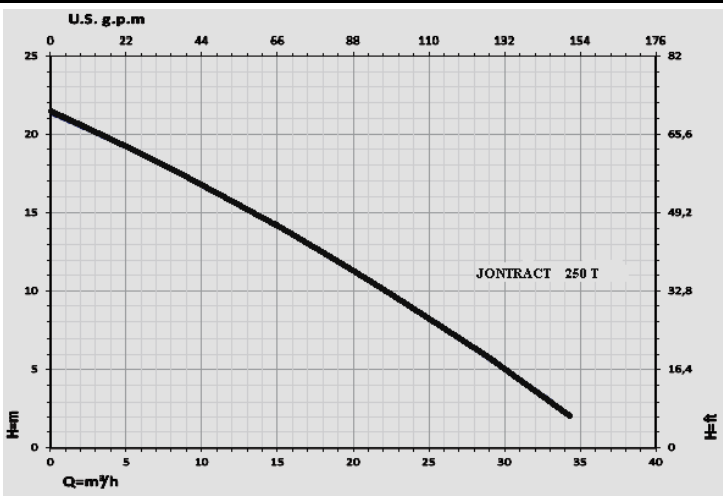

Weight : 25 Kg

Standard Approve



Applicant:

Work Site Trench Duct And
Underground Passage Pump Out
Sited to garage And Basament Pump Out Handling
Moderately Foull Water With Material
And/or Abrasive Material Contents

Dimention in

	mm
A	2" Inch
B	203
C	230
D	446