

Date: Page:

Pump Data	
Brand :	JMS
Model :	JONTRACT 650 T
Flow Rate:	132 GPM
Head Rate:	65.6 FEET
Head Max:	89 FEET
Flow Max:	327 GPM
RPM :	3450 rpm
Normal Power P1 :	8 HP
Fluid:	Water
Fluid Temperature:	at about 25 °C.
Density:	water 1.0 kg/Dm³
Fluid Viscosity:	8.90 × 10 ⁻⁴ Pa-s
With Float switch	NONE
kind of Working:	Submersible
Delivery size	3"
Suction size	With Strainer
Made in :	ITALY



Motor Data	
Power P2:	
Power P1:	6 KW
Phase (PH):	3
Rate Voltage :	230 V
Capacitor Need :	* μF
Ferequency :	60 Hz
Rated Speed (rpm):	3450 rpm
Max. I (A):	20.5 A
Cos φ :	0.85
Degree of Protection (IP):	IP 68
Safety Protection Included:	F
length of Cable :	10 M
Kind of Plug :	NONE
Ambient Temp :	40°C =104°F

Other Pump Data	
Impeller Size (mm) :	*
Pressuer Rating :	PN 16
Min. Fluid Temp :	10°C = 50°F
Max. Fluid Temp :	35°C = 95°F
Ambient Temp :	40°C = 104°F
Humidity % :	100%

Special Specification	
Installation status :	Vertical
Variable frequency :	NONE
Solid Passage	10 mm

Materials	
Pump Body :	Stainless steel
Support:	Stainless steel
Impeller	Special Stainless steel
Mechanical Seal:	Silicon Carbide / Ceramic
Rubber	NBR
Pump Shaft:	Stainless steel
Strainer	Stainless steel
outer cover:	CAST IRON
Motor:	Stainless steel

Shaft Seal	
Type:	*
Stationary Part	Silicon Carbide
Rotating Part	Silicon Carbide
Elastomer	NBR
Pump and Motor specification optional	
With Booster System	None
With Complack	None
Special Material	None
Specail Voltage	None
Protection system required	
External Flout switch	NONE
Minimum Starter	Starter SWT

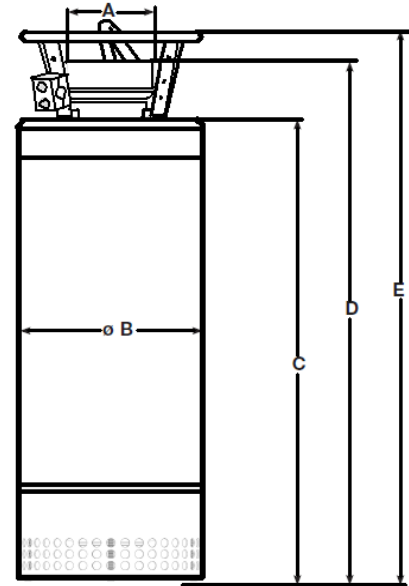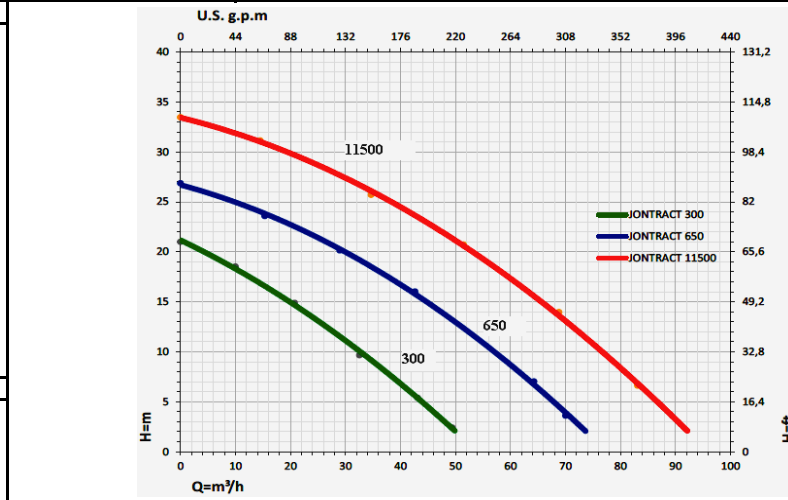

Weight : 43 Kg
Standard Approve
CE

Applicant:
Work Site Trench Duct And
Underground Passage Pump Out
Sitted to garage And Basament Pump Out Handling
Moderately Foull Water With Material
And/or Abrasive Material Contents

Dimention in	
	mm
A	3" Inch
B	204
C	526
D	594
E	620