



G.P.T CO

Gol Pump Technology Company

Designed for light weight, excellent performance, low energy consumption, and easy maintenance, PRORIL submersible handy pumps serve a wide range of pumping applications on utility, construction, industrial, and municipal job sites.

60Hz


Handy and Residue Pump

SMART 1500

Handy Pump



OPENED

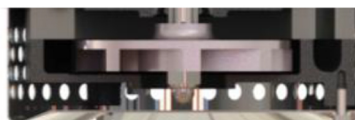




G.P.T CO

www.golpumps.com
www.golpumps.us

Hz 60

SMART 1500
Handy Pump

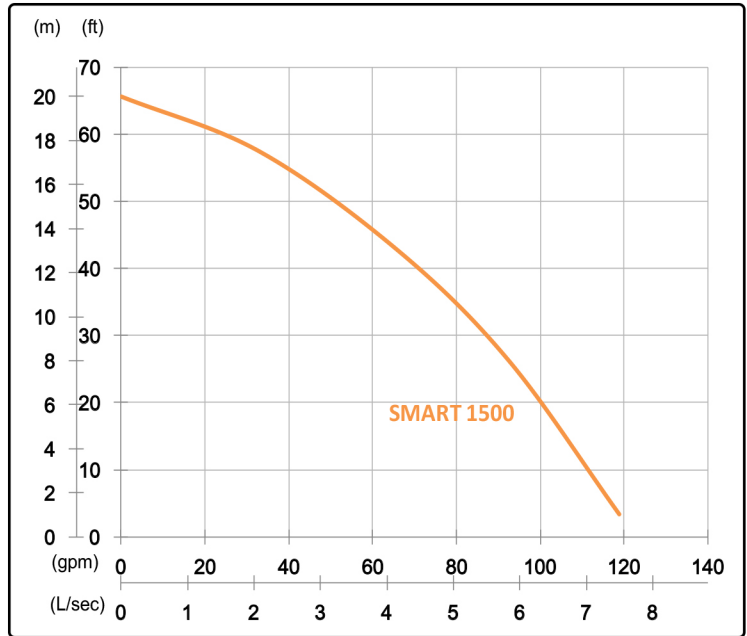

Shaft Speed : 3450 rpm

Outlet : 50mm, 2in

OUTPUT

HEAD

FLOW

1.5 kW

Rated : 13m, 43ft



Rated : 4.2 L/s, 66 gpm

2 HP

Max : 20m, 66ft

Max : 7.5 L/s, 119 gpm

Solid Passage : 9mm, 0.4in

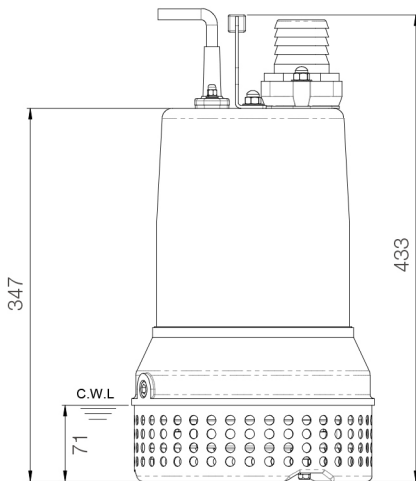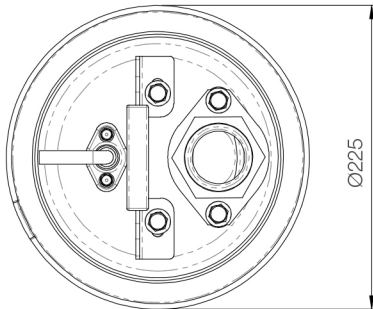

unit : mm

Weight : 24kg / 53 lbs

Pump Type		Electric Submersible Pumps
		1-Phase, 3-Phase
Motor	Type	Induction Motor
	Poles	2 Pole
	Insulation	Class F
	Protector	Circle Thermal Protector
Starter		1-Phase • Capacitor-Run, 3-Phase • D.O.L
Lubricant		Food Grade (ISO VG32)
Impeller Type		Opened
Shaft Seal		Double Mechanical Seal
		Silicon Carbide VS Ceramic / Carbon
Bearings		C3 Shielded ball bearings
Cable		PVC (CSA Certified) / H07RN-F
		10m (33ft) or longer upon request.
Materials	Pump Casing	Gray Iron
	Impeller	Gray Iron
	Motor Frame	Stainless Steel
	Motor Shaft	Stainless Steel
	Outer Case	Stainless Steel
Strainer		Stainless Steel
Max. Liquid Temperature		40°C (104°F)
Max. Submersion Depth		20m (66ft)
pH Range		pH 5 - pH 8