


Pump Data

Brand :	Gol Pump		
Model :	GKS-732		
Head Rate: 30 FEET	Flow Rate:	426 GPM	
Head Max: 41 FEET	Flow Max:	960 GPM	
Head Min: 6.6 FEET	Flow Min:	5 GPM	
RPM :	3550		
Normal Power P1 :	7.5 HP		
Fluid:	Water		
Fluid Temperature:	at about 25 °C.		
Density:	water 997 kg/m ³		
Fluid Viscosity:	8.90 × 10 ⁻⁴ Pa·s		
With Float switch	NONE		
Self Priming	Submersible		
Delivery size	6" NPT		
Suction size	With Strainer		
Made in :	TAIWAN		

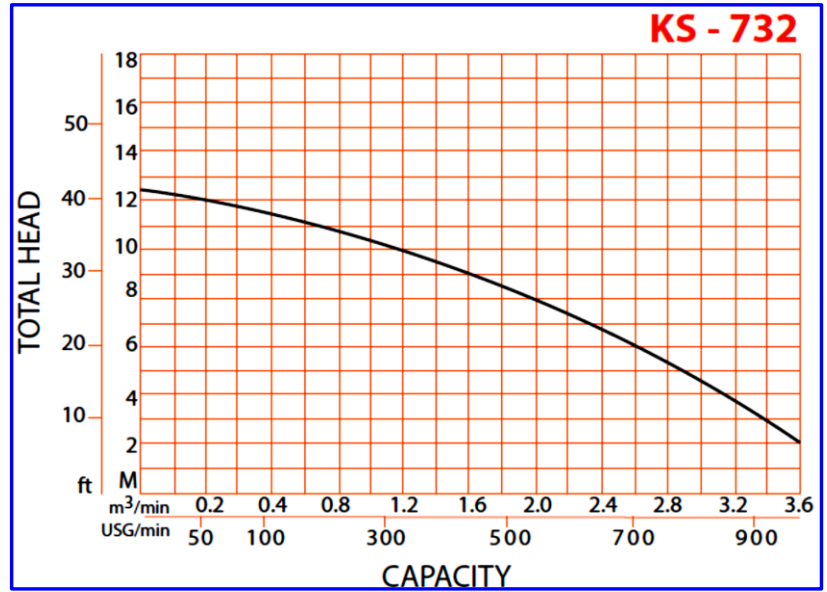

Motor Data

Power P2:			
Power P1:	5.625 KW		
Phase (PH):	3		
Rate Voltage :	480 V		
Capacitor Need :	*	µF	
Ferequency :	60 Hz		
Rated Speed (rpm):	3550 rpm		
Current (A):	8 A		
Cos φ :	0.85		
Degree of Protection (IP):	IP68		
Safety Protection Included :	*		
length of Cable :	5.5 10	mm2× m	
Kind of Plug :	NONE		
Ambient Temp :	40°C = 104°F		

Other Pump Data

Impeller Size (mm) :	*		
Pressuer Rating :	PN 16		
Min. Fluid Temp :	10°C = 50°F		
Max. Fluid Temp :	25°C = 77°F		
Ambient Temp :	40°C = 104°F		
Humidity % :	100%		

Special Specification

Installation status :	Ver & Hor		
Variable frequency :	NONE		
Solid Passage	31 × 22	mm	

Materials

Pump Body :	Cast Iron
Support:	Cast Iron
Impeller	Bronze
Mechanical Seal:	CA/CE/NBR,Inox
Rubber	NBR
Pump Shaft:	Stainless steel
Strainer	Stainless steel
outer cover:	Stainless steel
Motor:	Stainless steel

Shaft Seal

Type:	*
Stationary Part	Ceramic
Rotating Part	Carbon
Elastomer	NBR

Weight : 107 Kg

Standard Approve



Applicant:

Basement Drainage Water Supply for Landscape and Water Feature
Agricultural and Horticultural Irrigation Water Supply for Fountains and
Water and Water Discharge Waste Water Treatment Construction
Engineering Drainage System Agricultural Irrigation Fishing and Spraying
Water Features Water Discharge Work for Ships Any Kind of Standing

Dimention
in mm

A	335
B	
C	750
D	
E	

Pump and Motor specification optional

With Booster System	None
With Complack	None
Special Material	None
Specail Voltage	None

Protection system required

External Flout switch	None
Minimum Starter	Starter SWT

