



Pump Data

Brand :	Gol Pump		
Model :	GSTO-732		
Head Rate :	53 FEET	Flow Rate:	266 GPM
Head Max:	80 FEET	Flow Max:	640 GPM
Head Min:	6 FEET	Flow Min :	5 GPM
RPM :	1800		
Normal Power P1 :	7.5 HP		
Fluid:	Water		
Fluid Temperature:	at about 25 °C		
Density:	water 997 kg/m ³		
Fluid Viscosity:	8.90 × 10 ⁻⁴ Pa·s		
With Float switch	NONE		
Self Priming	Submersible		
Delivery size	4" NPT		
Suction size	With Strainer		
Made in :	TAIWAN		

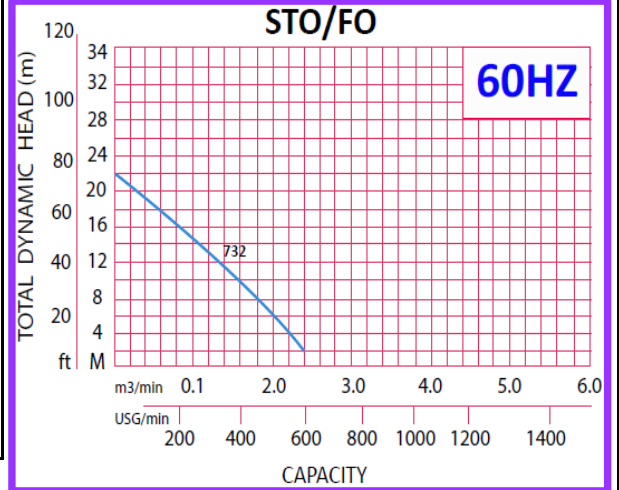

Motor Data

Power P2:	*		
Power P1:	5.5 KW		
Phase (PH):	3		
Rate Voltage :	230 V		
Capacitor Need :	*	μF	
Ferequency :	60 Hz		
Rated Speed (rpm):	1800 rpm		
Current (A):	18 A		
Cos φ :	0.85		
Degree of Protection (IP):	IP 68		
Safety Protection Included:	E		
length of Cable :	5.5 × 10	mm2×m	
Kind of Plug :	NONE		
Ambient Temp :	40°C = 104°F		

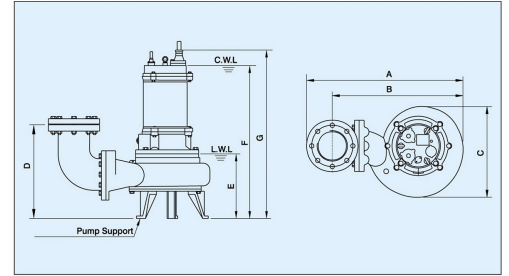

Other Pump Data

Impeller Size (mm) :	*		
Pressuer Rating :	PN 16		
Min. Fluid Temp :	10°C = 50°F		
Max. Fluid Temp :	40°C = 104°F		
Ambient Temp :	40°C = 104°F		
Humidity % :	100%		

Weight : 334.4 LB
Standard Approve

Applicant:

Dimention in

Special Specification			
Installation status :	Ver		
Variable frequency :	NONE		
Solid Passage	88 × 46	mm	

Materials

Pump Body :	Cast Iron		
Support:	Cast Iron		
Impeller	Cast Iron		
Mechanical Seal:	Silicon Carbide		
Rubber	Steel		
Pump Shaft:	SUS 304		
Strainer	Cast Iron		
outer cover:	Cast Iron		
Motor:	Cast Iron		

Shaft Seal

Type:	*		
Stationary Part	SUS 304		
Rotating Part	SUS 304		
Elastomer	Cast Iron		

Pump and Motor specification optional

With Booster System	None		
With Complack	None		
Special Material	None		
Specail Voltage	None		

Protection system required

External Flout switch	NONE		
Minimum Starter	Starter SWT		

CSA



UL



CE



Effluent Pumping in Industrial Waste Water

Treatment Plants Sewage Waste Water and Solid

Treatment in Various Factories and Building

Sites Food Processing Factory Confined

Livestock Feeding Industry Restaurants and

Shops Markets and Super Markets

A	26.8
B	22.7
C	15.2
D	14.4
E	11.3
F	28.1
G	31.4