


Company name
 Respons. Department
 Person in charge
 Phone number
 Fax no
 E-mail address

Receiver	From

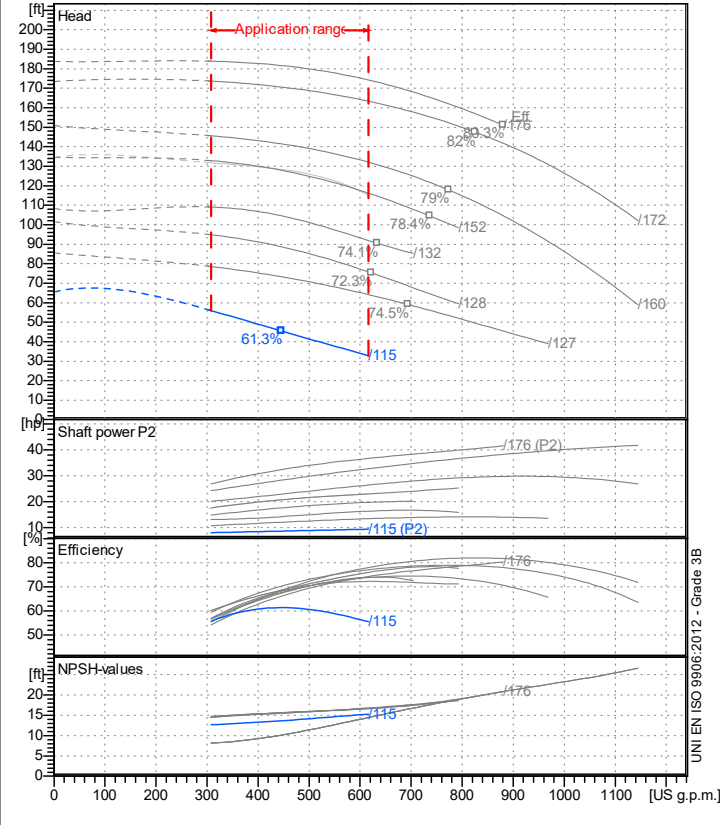

Operating data specification

Nominal flow	US g.p.m. 0
Nominal head	ft 0
Static head	ft 0
NPSH - v value of plant	ft 0
Inlet pressure	psi 1.42
Fluid	Water, pure
Operating temperature t A	°F 68
Density at t A	lb/ft³ 62.32
Kin. viscosity at t A	ft²/s 1.082E-5


Pump			
Pump name		6BP17/115	
Size			
Design			
Speed	rpm 3550	No of stages	1
Impeller type			
Flow	Nominal	US g.p.m.	
	Max-	US g.p.m.	616
	Min-	US g.p.m.	308
Head	Nominal	ft	
	Max-	ft	56
	Min-	ft	32.8
Head H(Q=0)		ft	65.5
NPSH 3%		ft	
Max. working pressure		psi	28.4
Shaft power		hp	
Efficiency		%	
Max absorbed power		hp	9.3554

Materials Pump

Shaft	Stainless steel AISI 431 (1.4057)		
Impeller	Cast iron EN-GJL-250		
Pump body	Cast iron EN-GJL-250		
Seal disc	Cast iron EN-GJL-250		
Gasket	Natural fiber		
Mechanical seal	BVEG (Grafito/Ossido Allumina/EPDM)		

Dimensions in inch

a	2 ⁹ / ₁₆		
d	9 ⁹ / ₁₆		
f	14 ⁹ / ₁₆		
h1	5 ³ / ₁₆		
h2	7 ¹ / ₁₆		
m2	2 ³ / ₄		
n1	9 ⁷ / ₁₆	G 4"	G 4"
n2	7 ¹ / ₂		
w	10 ¹³ / ₁₆		

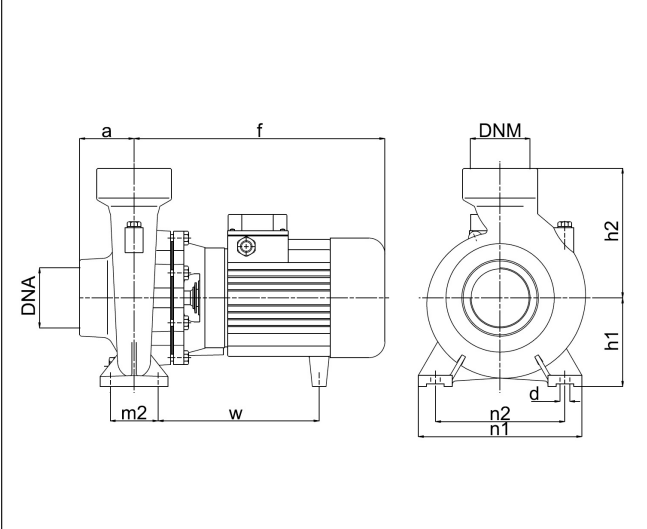

Motor	Frame size	112		
Manufacturer / Type	SAER	112-2P-10		
Rated power	hp 10.058	Efficiency 4/4	87.5 %	
Electric current	A 12.3	Speed	rpm 2925	
Electric voltage	V 460 V	3~	Hz 60	
Starting mode	Unknown			
Degree of protection	IP 55	Insulation class	F	

Remarks:		Project ID	Created by	Created on	Last update
				2022-07-26	

Receiver

From

 Company name
 Respons. Department
 Person in charge
 Phone number
 Fax no
 E-mail address

Operating area

Flow

Head

Impeller type

Operating data specification

0 US g.p.m.

0 ft

Impeller construction

Sense of rotation

Clockwise from the drive end

Pump data

US g.p.m.

ft


Outlet width

G4"

	Flow			Head		Shaft power P2			Speed	
	Min.	Max.	η Max.	H(Q=0)	η Max.	P2(Q=0)	Max.	η Max.	rpm	
	US g.p.m.	US g.p.m.	US g.p.m.	ft	ft	hp	hp	hp	Hz	
	308	616	446	65.5	45.4		9.36	8.61	3550	60 Hz

 Performance data based to: Water, pure [100%]; 68°F; 62.3lb/ft³; 1.08E-5ft²/s

UNI EN ISO 9906:2012 - Grade 3B

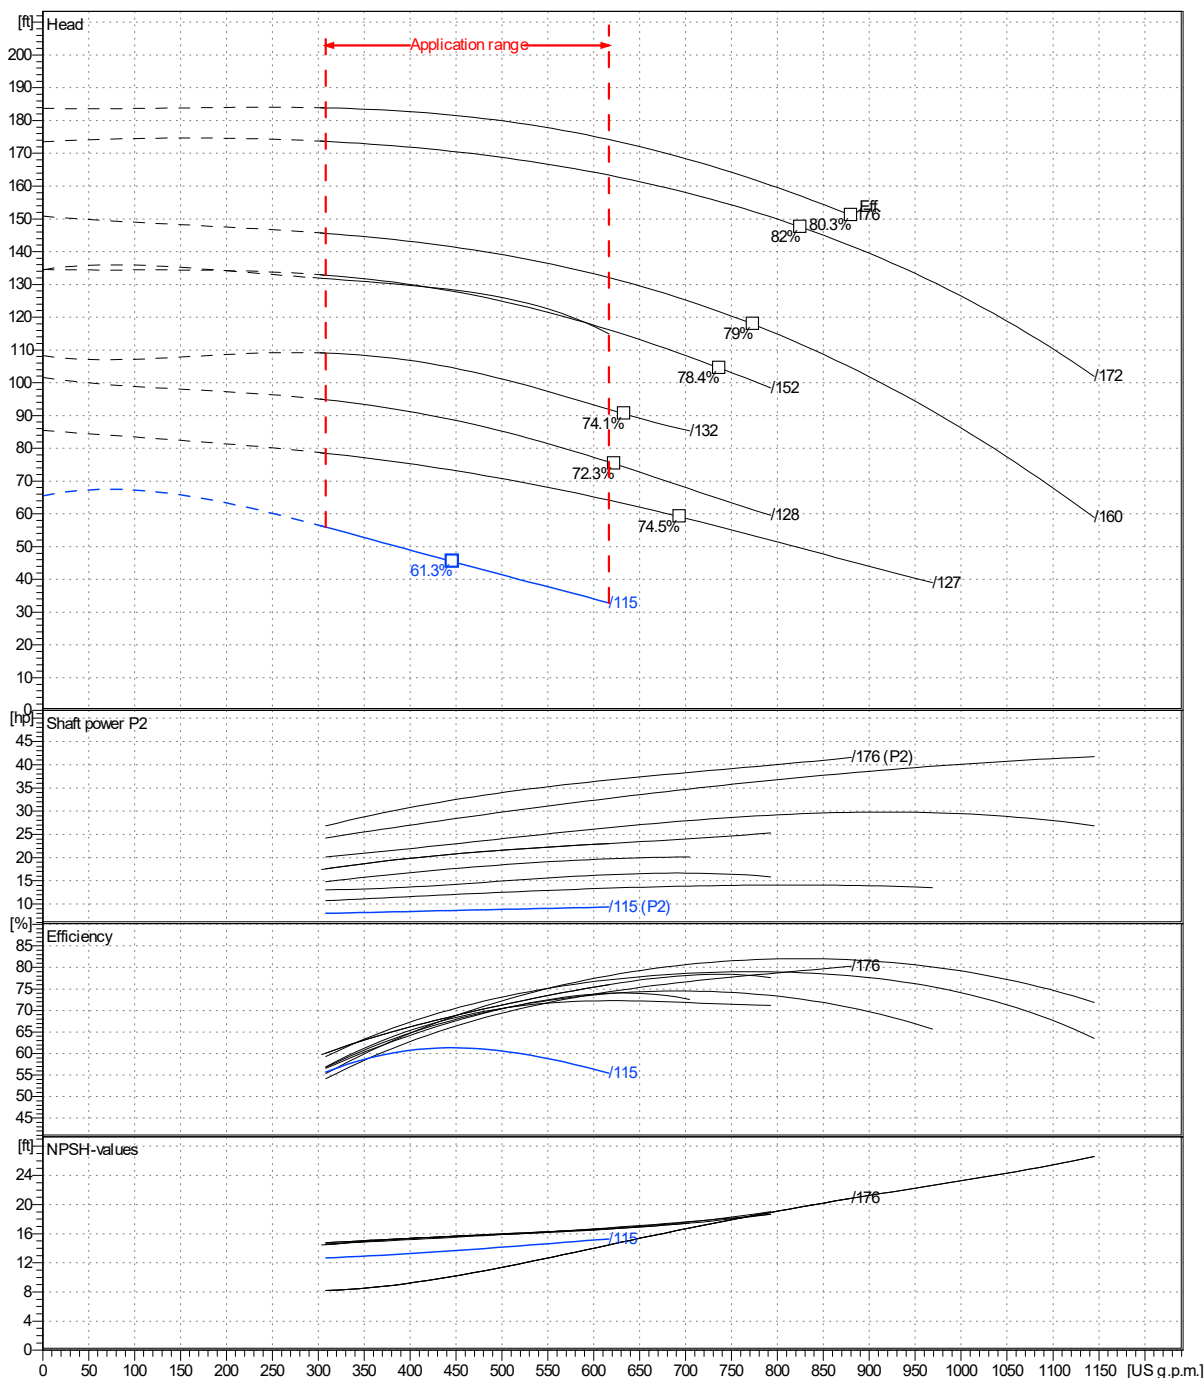

Project

Project ID


Created by

Created on

Last update

2022-07-26

Company name
 Respons. Department
 Person in charge
 Phone number
 Fax no
 E-mail address

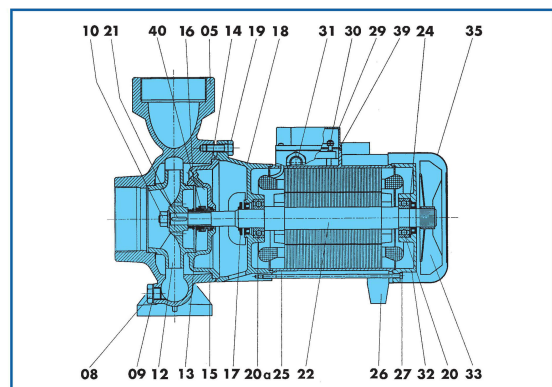

BP 7-8-9-10-11-12-13-14-15-16-17

RIF. REF. NUM.	COMPONENT	COMPONENTE	COMPONENTE
05	Pump body	Corpo pompa	Cuerpo de bomba
08	Plug	Tappo	Tapon
09	Gasket	Guarnizione	Empaquetadura
10	Nut	Dado	Tuerca
12	Impeller	Girante	Impulsor
13	Rotating mechanical seal	Parte rotante tenuta meccanica	Cierre mecanico parte girante
14	O-Ring	Anello OR	Anillo OR
15	Fixed mechanical seal	Parte fissa tenuta meccanica	Cierre mecanico parte fija
16	Seal holding disc	Disco porta tenuta	Anillo intermedio
17	Drop guard	Paragoccia	Paragotas
18	Support	Supporto	Soporte
19	Screw	Vite	Tomillo
20	Bearing	Cuscinetto	Cojinete
20a	Bearing	Cuscinetto	Cojinete
21	Key	Linguetta	Chaveta
22	Rotating shaft	Albero rotante	Eje rotatorio
24	Circlip	Anello elastico	Anillo elastico
25	Casing with wound stator	Carcassa statore avvolto	Carcasa estator envuelto
26	Foot	Piede	Pie
27	Tie-rod	Tirante	Tirante
29	Terminal board cover	Coperchio morsettiera	Tapa de bornes
30	Terminal board	Morsettiera	Bornes
31	Fairlead	Pressacavo	Guia
32	Driving cap	Calotta motore	Tapa motor
33	Fan	Ventola	Ventilador
35	Fan cover	Copriventola	Tapa ventilador
39	Terminal board gasket	Guarnizione morsettiera	Empaquetadura bornes
40	Bushing	Bussola	Casquillo

Project

Project ID

Created by

 Created on
2022-07-26

Last update