


Pump Data

Brand : JMS
 Model : JURBO - L 200

Head Rate: 50 FEET Flow Rate: 44 GPM
 Head Max: 66 FEET Flow Max: 113 GPM
 Head Min: 6 FEET Flow Min: 5 GPM

RPM : 3450 rpm
 Normal Power P1 : 3.5 HP
 Fluid: Water
 Fluid Temperature: at about 25 °C.
 Density: water 1.0 kg/Dm³
 Fluid Viscosity: 8.90 × 10⁻⁴ Pa·s
 With Float switch: NONE
 Kind of Workiny: Submersible
 Delivery size: 2" NPT
 Suction size: With Strainer
 Made in : ITALY

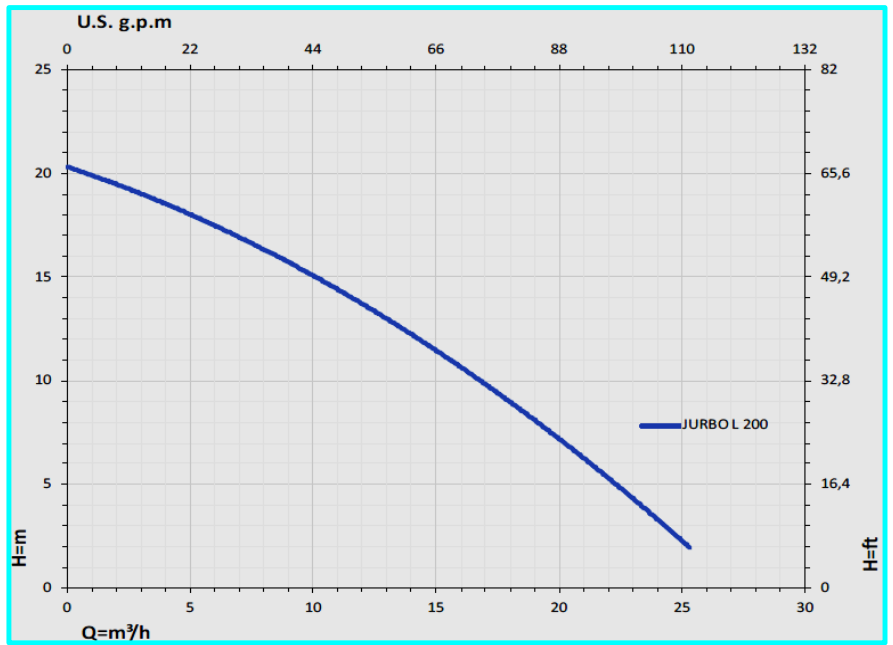

Motor Data

Power P2:
 Power P1: 2.5 KW
 Phase (PH): 3
 Rate Voltage : 230 V
 Capacitor Need : * μF
 Ferequency : 60 Hz
 Rated Speed (rpm): 3450 rpm
 Max. I (A): 7 A
 Cos φ : 0.85
 Degree of Protection (IP): IP 68
 Safety Protection Included: F
 length of Cable : 10 M
 Kind of Plug : NONE
 Ambient Temp : 40°C = 104°F

Other Pump Data


Impeller Size (mm) : *
 Pressuer Rating : PN 16
 Min. Fluid Temp : 10°C = 50°F
 Max. Fluid Temp : 35°C = 95°F
 Ambient Temp : 40°C = 104°F
 Humidity % : 100%

Special Specification

Installation status : Vertical
 Variable frequency : NONE
 Solid Passage *

Materials

Pump Body : Cast Iron
 Support: Stainless steel
 Impeller: Cast Iron
 Mechanical Seal: Silicon Carbide
 Rubber: NBR
 Pump Shaft: Stainless steel
 Strainer: Stainless steel
 outer cover: Cast Iron
 Motor Case: Cast Iron

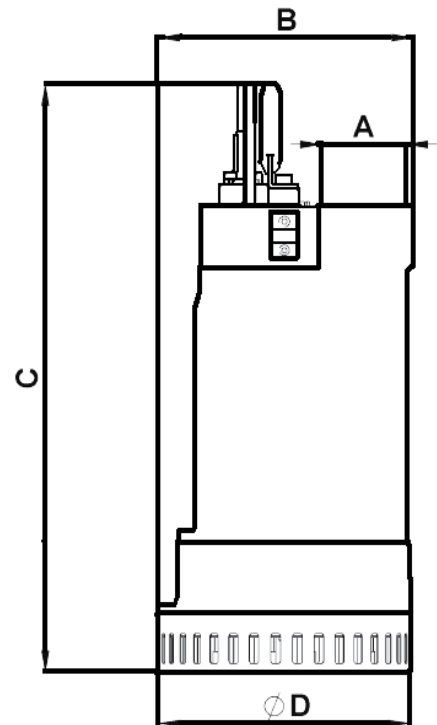

Shaft Seal

Type: *
 Stationary Part: Stainless steel
 Rotating Part: Stainless steel
 Elastomer: NBR

Weight : 32.5 Kg
 Standard Approve
 CE **CE**

Pump and Motor specification optional

With Booster System: None
 With Complack: None
 Special Material: None
 Speccail Voltage: None

Protection system required

External Flout switch: NONE
 Minimum Starter: Starter SWT

Applicant:

Cellar, Garage and Basement Pump out Particularly
 Suited to Construction Work Sites Swimming Pools
 All Sorts of Vats Tanks and Reservoir Pump out
 Rain Seepage Sump Pit and Catch Tank Water Pump
 out, Garden and Vegetable-Garden Irrigation

Dimention in

mm
 A 2" NPT
 B 204
 C 472
 D 202