


# TANK 8220

60 Hz

## High Chrome Dewatering Pump

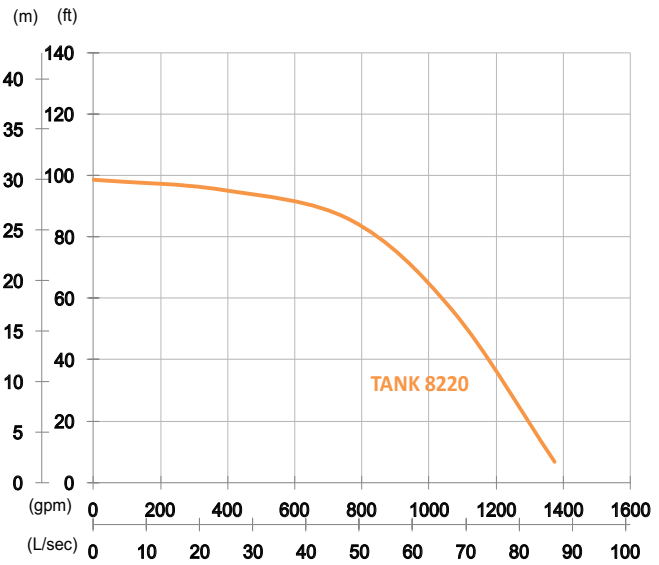



Shaft Speed : 3450 rpm

Outlet : 200mm, 8in

OUTPUT	HEAD	FLOW
22 kW	Rated : 26m, 85ft	Rated : 48.3 L/s, 766 gpm
30 HP	Max : 30m, 98ft	Max : 86.7 L/s, 1374 gpm

Solid Passage : 20mm, 0.8in

Ø424

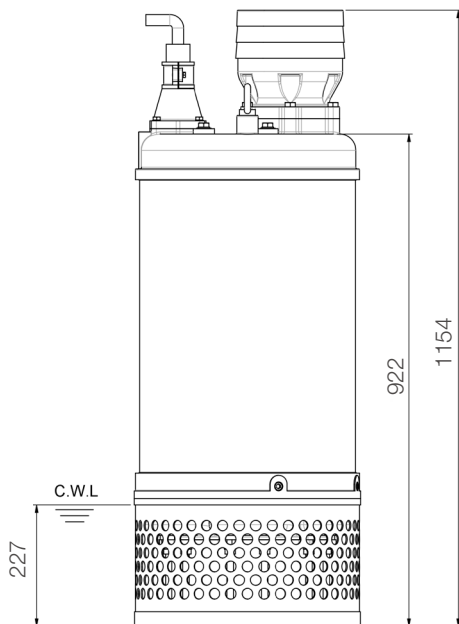

unit : mm

Weight : 264kg / 582 lbs

Pump Type	Electric Submersible Pumps	
	3-Phase, 460V	
Motor	Type	Induction Motor
	Poles	2 Pole
	Insulation	Class F
	Protector	Circle Thermal Protector
	Starter	3-Phase · D.O.L.
Lubricant	Food Grade (ISO VG32)	
Impeller Type	Opened	
Shaft Seal	Double Mechanical Seal	
	Silicon Carbide VS Ceramic / Carbon	
Bearings	C3 Shielded ball bearings	
Cable	PVC (CSA Certified) / H07BQ-F	
	10m (33ft) or longer upon request.	
Materials	Pump Casing	Gray Iron
	Impeller	Chromium Iron
	Motor Frame	Gray Iron
	Motor Shaft	Stainless Steel
	Strainer	Stainless Steel
Max. Liquid Temperature	40°C (104°F)	
Max. Submersion Depth	20m (66ft)	
pH Range	pH 5 - pH 8	