



Receiver


From

 Company name
 Respons. Department
 Person in charge
 Phone number
 Fax no
 E-mail address

| | | | | | | |
|------------------------------|----------|----------|--------------|--------|------------------------------|--------------|
| Operating area | Flow | | Head | | Impeller type | |
| Operating data specification | 0 | US g.p.m | 0 | ft | Impeller construction | |
| Pump data | US g.p.m | | ft | | Sense of rotation | |
| | | | | | Clockwise from the drive end | |
| | | | | | Outlet width | |
| | | | | | G3" | |
| | | | | | Speed | |
| | | | | | rpm 3550 | |
| | | | | | Frequency | |
| | | | | | Hz 60 Hz | |
| | Flow | | Head | | Shaft power P2 | |
| | Min. | Max. | η_{Max} | H(Q=0) | η_{Max} | P2(Q=0) |
| | US g.p.m | US g.p.m | US g.p.m | ft | ft | hp |
| | 220 | 660 | 571 | 263 | 228 | 47 |
| | | | | | | Max. |
| | | | | | | η_{Max} |
| | | | | | | hp |
| | | | | | | 44.3 |

 Performance data based to: Water, pure [100%] ; 68°F; 62.3lb/ft³; 1.08E-5ft²/s


UNI EN ISO 9906:2012 - Grade 3B

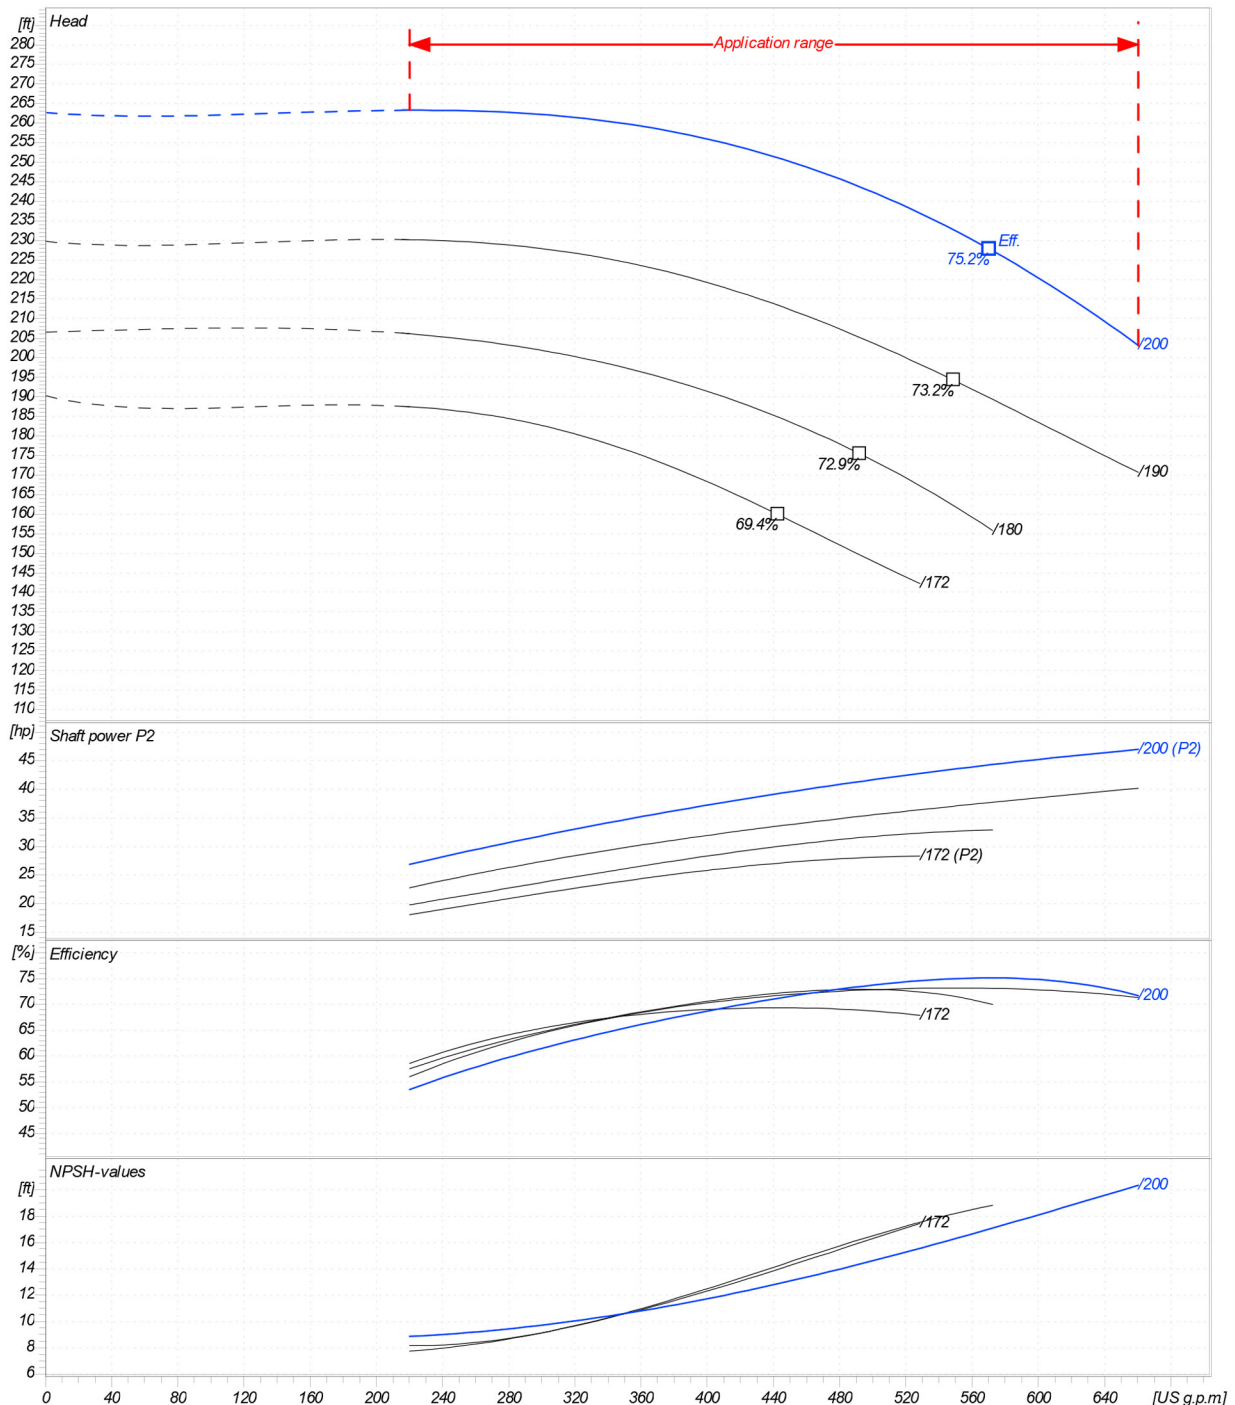


| | | | | |
|---------|------------|------------|------------|-------------|
| Project | Project ID | Created by | Created on | Last update |
| | | | 2020/07/07 | |




Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address

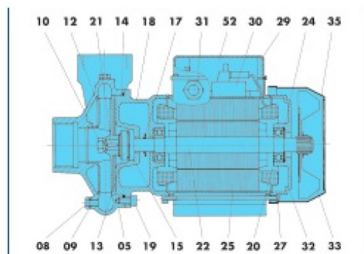

6BP 3-4-5

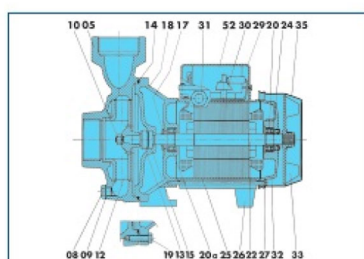

6BP 6

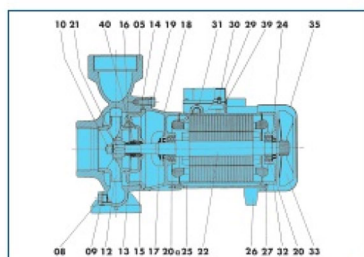

6BP 7-8-9-10-11-12-13-14-15-16-17

| REF. REF. NUM. | COMPONENT | COMPONENTE | COMPONENTE |
|----------------|--------------------------|--------------------------------|-------------------------------|
| 05 | Pump body | Corpo pompa | Cuerpo de bomba |
| 08 | Plug | Tappo | Tapon |
| 09 | Gasket | Guarnizione | Empaquetadura |
| 10 | Nut | Dado | Tuerca |
| 12 | Impeller | Girante | Impulsor |
| 13 | Rotating mechanical seal | Parte rotante tenuta meccanica | Cierre mecanico parte girante |
| 14 | O-Ring | Anello OR | Anillo OR |
| 15 | Fixed mechanical seal | Parte fissa tenuta meccanica | Cierre mecanico parte fija |
| 16 | Seal holding disc | Disco porta tenuta | Anillo intermedio |
| 17 | Drop guard | Paragocce | Paragotas |
| 18 | Support | Supporto | Soporte |
| 19 | Screw | Vite | Tornillo |
| 20 | Bearing | Cuscinetto | Cojinete |
| 20a | Bearing | Cuscinetto | Cojinete |
| 21 | Key | Linguetta | Chaveta |
| 22 | Rotating shaft | Albero rotante | Eje rotorio |
| 24 | Circlip | Anello elastico | Anillo elastico |
| 25 | Casing with wound stator | Carcassa statore avvolto | Carcasa estator enovuelto |
| 26 | Foot | Piede | Pie |
| 27 | Tie-rod | Tirante | Tirante |
| 29 | Terminal board cover | Coperchio morsettiere | Tapa de bornes |
| 30 | Terminal board | Morsettiere | Bornes |
| 31 | Fairhead | Pressacavo | Guia |
| 32 | Driving cap | Calotta motore | Tapa motor |
| 33 | Fan | Ventola | Ventilador |
| 35 | Fan cover | Copri ventola | Tapa ventilador |
| 39 | Terminal board gasket | Guarnizione morsettiere | Empaquetadura bornes |
| 40 | Bushing | Bussola | Casquillo |
| 52 | Capacitor | Condensatore | Condensador |

Project

Project ID

Created by

Created on

Last update

2020/07/07



GOL PUMPS TECHNOLOGY INC

3750 NW 114 AVE #6 MIAMI, FL 33178

Ph: +1 (786) 615 8984

Fax: +1 (786) 615 7043

Info@golpumps.com

www.golpumps.com