


**Pump Data**

Brand :	<b>Gol Pump</b>		
Model :	<b>GPDC110V/1 -80-3- 0.9-1</b>		
Head Rate :	201 FEET	Flow Rate:	6.6 GPM
Head Min:	60 FEET	Flow Max:	12.2 GPM
Head Max:	240 FEET	Flow Min :	2.2 GPM
RPM :	5000 rpm		
Normal Power P1 :	1.2 HP		
Fluid:	Water		
Fluid Temperature:	at about 25 °C		
Density:	water 997 kg/m <sup>3</sup>		
Fluid Viscosity:	8.90 × 10 <sup>-4</sup> Pa·s		
With Float switch	NONE		
Kind of Pump	Submersible		
Delivery size	1" Outlet with hose head		
Suction size	With Strainer		
Made in :	CHINA		

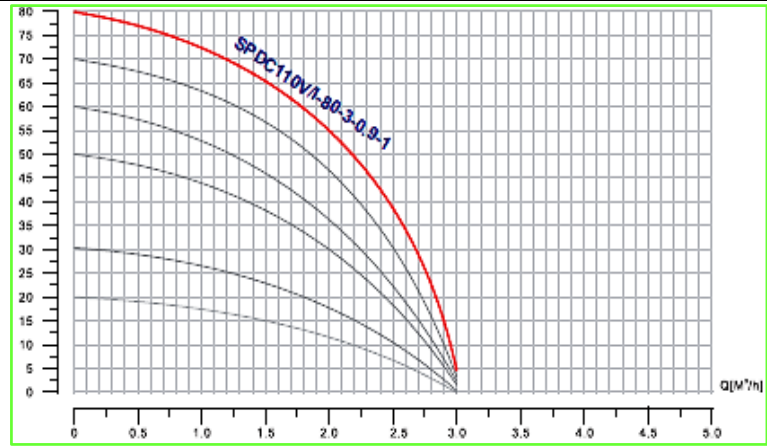

**Motor Data**

KIND OF Motor	with Brush
Power P1:	0.9 KW
Phase (PH):	DC SINGLE PHASE
Rate Voltage :	110 VDC
Capacitor Need :	NONE
Ferequency :	DC
Rated Speed (rpm):	5000 rpm
Current (A):	8.1 A
Cos φ :	1
Degree of Protection (IP):	IP 68
Safety Protection Included :	E
length of Cable :	20 M
Kind of Plug :	NONE
Ambient Temp :	40°C = 104°F

**Other Pump Data**

Impeller Model :	Noryl
Pressuer Rating :	PN 16
Min. Fluid Temp :	0°C = 32° F
Max. Fluid Temp :	90°C = 234°F
Ambient Temp :	40°C = 104°F
Humidity % :	100%

**Special Specification**

Installation status :	Vertical
Variable frequency :	NONE
Solid Passage:	80 Gr/M3

**Materials**

Pump Body :	Cast Iron
Diffuser :	Noryl
Impeller:	Noryl
Mechanical Seal:	CE/CA/NBR/INOX
Rubber:	NBR
Pump Shaft:	SUS 304
Strainer:	SUS 304
outer cover:	Cast Iron
Motor:	Cast Iron

**Shaft Seal**

Type:	*
Stationary Part:	Ceramic
Rotating Part:	Carbon
Elastomer:	NBR

**Standard Approve :**

Weight : \* Kg


CE



Rev : 2021 / 02



**Direct Connection to Solar Panel**

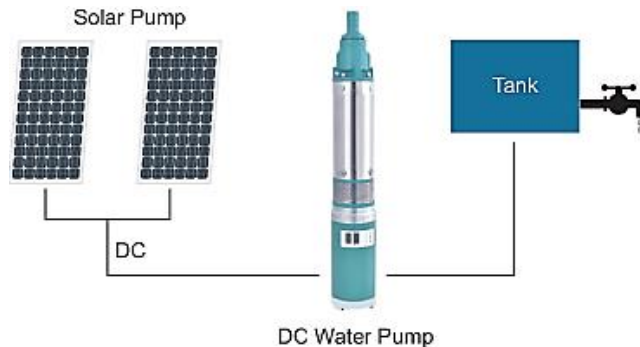

**Applicant :**

Irrigation, Livestock, Garden Fountains,

Home Supply, Large Scale Watering System

Commercial Establishments, Solar Water Treatment

DC Solar Water Pump Connect to Solar Panel Directly

DC Solar Water Pump Connect to Battery Directly